

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1704759207](#)
Status: **Active**
Overview: Impact™ Backplane Connector and Cable Assembly System
Description: Impact™ 85 Ohm Plus 5 Pair Vertical Backplane Header, Right Guide with Endwall, 12 Columns, 180 Circuits, Pin Length 4.90mm, Plated Through Hole Dimension 0.39mm, Lead Free

Documents:

[Drawing \(PDF\)](#) [Application Specification AS-76060-990 \(PDF\)](#)
[Product Specification PS-170540-999 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

UL E29179


General

Product Family Backplane Connectors
Series [170475](#)
Application Conventional
Component Type PCB Header
Overview Impact™ Backplane Connector and Cable Assembly System
Product Name Impact™
UPC 884982897441

Physical

Circuits (Loaded) 180
Circuits (maximum) 180
Color - Resin Gray
Durability (mating cycles max) 200
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part Yes
Keying to Mating Part None
Material - Metal High Performance Alloy (HPA)
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Net Weight 8.705/g
Number of Columns 12
Number of Pairs 5
Number of Rows 15
Orientation Vertical
PC Tail Length 1.40mm
PCB Locator No
PCB Retention None
PCB Thickness - Recommended 1.00mm
Packaging Type Tray
Pitch - Mating Interface 1.35mm, 1.90mm
Pitch - Termination Interface 1.35mm, 1.90mm
Plating min - Mating 0.762µm
Polarized to PCB No
Stackable No
Surface Mount Compatible (SMC) No
Temperature Range - Operating -55°C to +85°C
Termination Interface: Style Through Hole - Compliant Pin

Electrical

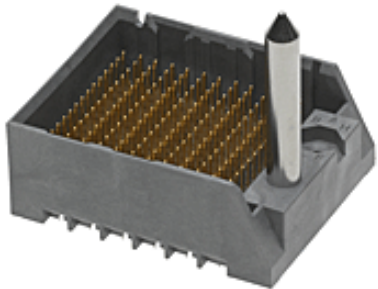

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Contains SVHC(2014 December 17): No

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

Search Parts in this Series

[170475](#) Series

Mates With

[170480](#) Impact™ 85 Ohm Plus Right Angle Receptacle

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Impact™ 85 Ohm Backplane Press-In Tool for 5-Pair by 12-Column Assemblies	0622018804
Impact™ Insertion Tool	0621005850

Current - Maximum per Contact	0.75A	Backplane Header <u>0621009610</u> Removal Tool for GbX-U™, I-Trac™, Impact™, or TinMan
Data Rate	25.0 Gbps	
Impedance	85#	
Shield Type	N/A	
Shielded	No	
Voltage - Maximum	30V AC (RMS)/DC	
Solder Process Data		
Lead-freeProcess Capability	N/A	
Material Info		
Reference - Drawing Numbers		
Application Specification	AS-76060-990	
Product Specification	PS-170540-999	
Sales Drawing	SD-170475-0003	
Symbol/Footprint Data	SYM-170475-9207	

This document was generated on 06/30/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION