


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD/PIGTAIL LENGTHS AND PACKAGE QUANTITY.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

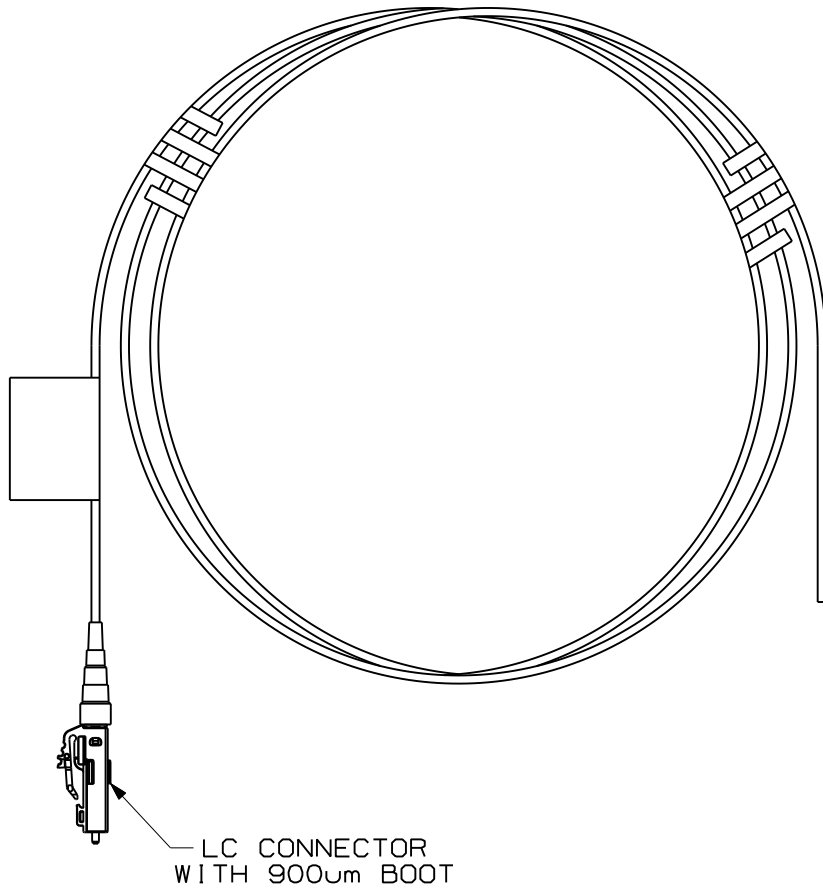

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	09-09-09	EFK		RELEASED TO PRODUCTION	02779-63				



FIBER OPTIC 900um BUFFERED LC PIGTAIL CUSTOMER DRAWING	
	PANDUIT ™ CORP. TINLEY PARK, ILL 60477
THIRD ANGLE PROJECTION	ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (.XXX) ±.010 (.3) (.XX) ±.03 (.8) ANGLES
DRAWN BY: EFK DATE: 09-09-09 CHK'D:	DRAWING FILENAME: M02779CZ_DC/01A SCALE: NONE PART NO.: SEE SHEET 2 DRAWING NO.: 02779-63 SHEET 1 OF 2 SIZE: A

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FIBER OPTIC 900 μ m BUFFERED LC PIGTAIL							
PANDUIT PART NO.	CABLE				CONNECTOR		
	RATING	FIBER TYPE	COUNT	COLOR	MAX. IL	MIN. RL	BOOT COLOR
F5B10-NM*	RISER (OFNR)	50/125 μ m	SIMPLEX 900 μ m BUFFERED FIBER	BLUE	0.25dB	20dB	BLACK
F6B10-NM*		62.5/125 μ m					ELECTRIC IVORY
FXB10-NM*		10GbE OM3			0.25dB	26dB	AQUA
FXOB10-NM*		OPTIMIZED 10GbE OM3					
FZB10-NM*		10GbE OM4			0.25dB	26dB	AQUA
FZOB10-NM*		OPTIMIZED 10GbE OM4					
F9B10-NM*		9/125 μ m OS1			0.35dB	55dB	BLUE

* - DENOTES PIGTAIL LENGTH, WHERE M = METERS AND F = FEET

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	09-09-09	EFK		RELEASED TO PRODUCTION	02779-63				

FIBER OPTIC 900 μ m BUFFERED LC PIGTAIL CUSTOMER DRAWING									
				PANDUIT TM CORP. TINLEY PARK, ILL 60477					
				ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (.XXX) ±.010 (.3) ±.010 (.8) ±.015 (1.0) ±.020 (1.5) ±.025 (2.0) ±.030 (3.0) ±.040 (4.0) ±.050 (6.0) ±.060 (8.0) ±.075 (10) ±.090 (12) ±.100 (15) ±.120 (20) ±.150 (25) ±.180 (30) ±.200 (40) ±.250 (50) ±.300 (60) ±.350 (80) ±.450 (100) ±.600 (120) ±.750 (150) ±.900 (200) ±.1.200 (300) ±.1.800 (400) ±.2.400 (500) ±.3.000 (600) ±.3.600 (800) ±.4.800 (1000) ±.6.000				DRAWING FILENAME M02779CZ_DC/01A	
				SCALE NONE				PART NO. SEE TABLE	
				DRAWN BY EFK				REVIEW DRAWING NUMBERS AS NOTED	
				DATE 09-09-09				DRAWING NO. 02779-63	
				CHK'D				SHEET 2 OF 2	
								SIZE A	