



FCIconnect.com

Configuration of Documents

P/N	Documents	No.	Title	CAT.No.
SFW_S-25T(M)E1	Specification Connector dwg.	SC-SFWS01	CAT.NO.TABLE FOR 1mm SPACING SMT CONNECTOR	SFW_S-25T__
		JSAG3342	1mm SPACING SURFACE MOUNT FPC/FFC CONNECTOR	SFW_S-25T__
		JSAG3579	1mm SPACING SURFACE MOUNT FPC/FFC CONNECTOR	SFW_S-25T__
		JSAG3836	CAT. NO. TABLE FOR PLASTIC TAPE PACKAGED 1mm SPACING SMT CONN.	SFW_S-25T_E1
		JSAG3343	PLASTIC TAPE PACKAGED 1mm SPACING SMT CONNECTOR	SFW_S-25T_E1
		JSAG3338	RECOMMENDED CABLE	SFW_S-25T__
SFW_S-65T(M)E1	Cable dwg.	JSAG3340	RECOMMENDED CABLE	SFW_S-25T__
	Manual	JSAG3341		SFW_S-25T__
		BJM-SFWS101		
	Specification Connector dwg.	SC-SFWS02	CAT.NO.TABLE FOR 1mm SPACING SMT CONNECTOR	SFW_S-65T__
		JSAG3900	1mm SPACING SURFACE MOUNT CFC CONNECTOR	SFW_S-65T__
		JSAG3905	1mm SPACING SURFACE MOUNT CFC CONNECTOR	SFW_S-65T__
SFW_S-25T(M)E1LF	Cable dwg.	JSAG3901	CAT. NO. TABLE FOR PLASTIC TAPE PACKAGED 1mm SPACING SMT CONN.	SFW_S-65T_E1
	Manual	JSAG3902	PLASTIC TAPE PACKAGED 1mm SPACING SMT CONNECTOR	SFW_S-65T_E1
		JSAG3903	RECOMMENDED CABLE	SFW_S-65T__
		JSAG3904		
	Specification Connector dwg.	SC-SFWS03	CAT.NO.TABLE FOR 1mm SPACING SMT CONNECTOR	SFW_S-25T__LF
		JSAG6516	1mm SPACING SURFACE MOUNT FPC/FFC CONNECTOR	SFW_S-25T__LF
SFW_S-65T(M)E1LF	Cable dwg.	JSAG6517	CAT. NO. TABLE FOR PLASTIC TAPE PACKAGED 1mm SPACING SMT CONN.	SFW_S-25T_E1LF
	Manual	JSAG6518	PLASTIC TAPE PACKAGED 1mm SPACING SMT CONNECTOR	SFW_S-25T_E1LF
		JSAG6519	RECOMMENDED CABLE	SFW_S-25T__LF
		JSAG6520	RECOMMENDED CABLE	SFW_S-25T__LF
		JSAG3340		
		JSAG3341		
SFW_S-65T(M)E1LF	Specification Connector dwg.	SC-SFWS04	CAT. NO. TABLE FOR 1mm SPACING SMT CONNECTOR	SFW_S-65T__LF
		JSAG6521	1mm SPACING SURFACE MOUNT CFC CONNECTOR	SFW_S-65T__LF
		JSAG6522	1mm SPACING SURFACE MOUNT CFC CONNECTOR	SFW_S-65T__LF
		JSAG6523	CAT. NO. TABLE FOR PLASTIC TAPE PACKAGED 1mm SPACING SMT CONN.	SFW_S-65T_E1LF
		JSAG6524	PLASTIC TAPE PACKAGED 1mm SPACING SMT CONNECTOR	SFW_S-65T_E1LF
		JSAG6525	RECOMMENDED CABLE	SFW_S-65T__LF

mat'l. code				surface 58 / tolerance ISO 1302 / ISO 406 / ISO 1101		projection		product family 58SF		CODE JP	
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm		title			
A	J05-0334	H.T	6/3/'05	angles		mm		SFW_S Documents Configuration			
B	J05-0377	H.T	6/22/'05	linear		mm		(1mm Spacing connector)			
C	J06-0430	H.T	10/19/'06			scale		dwg no sheet 1 of 1 size			
				dr		FCI		JSA96060 A4			
				engr				type Product Customer Drawing			
				chr				Rev.			
				appd				C			
sheet index	revision sheet	C	1								

CAT. NO. & DIMENSIONS

NOTE3	NO. OF CONTACTS (n)	CAT. NO.	DIMENSIONS (NOTE2)		
			A ±0.2	B ±0.2	C ±0.2
	4	SFW4S-6ST____LF	10.4	5.24	3
	5	SFW5S-6ST____LF	11.4	6.24	4
	6	SFW6S-6ST____LF	12.4	7.24	5
*	7	SFW7S-6ST____LF	13.4	8.24	6
	8	SFW8S-6ST____LF	14.4	9.24	7
*	9	SFW9S-6ST____LF	15.4	10.24	8
	10	SFW10S-6ST____LF	16.4	11.24	9
	11	SFW11S-6ST____LF	17.4	12.24	10
*	12	SFW12S-6ST____LF	18.4	13.24	11
	13	SFW13S-6ST____LF	19.4	14.24	12
	14	SFW14S-6ST____LF	20.4	15.24	13
	15	SFW15S-6ST____LF	21.4	16.24	14
	16	SFW16S-6ST____LF	22.4	17.24	15
	17	SFW17S-6ST____LF	23.4	18.24	16
*	18	SFW18S-6ST____LF	24.4	19.24	17
*	19	SFW19S-6ST____LF	25.4	20.24	18
	20	SFW20S-6ST____LF	26.4	21.24	19
*	21	SFW21S-6ST____LF	27.4	22.24	20
	22	SFW22S-6ST____LF	28.4	23.24	21
	23	SFW23S-6ST____LF	29.4	24.24	22
	24	SFW24S-6ST____LF	30.4	25.24	23
*	25	SFW25S-6ST____LF	31.4	26.24	24
	26	SFW26S-6ST____LF	32.4	27.24	25
*	27	SFW27S-6ST____LF	33.4	28.24	26
	28	SFW28S-6ST____LF	34.4	29.24	27
	29	SFW29S-6ST____LF	35.4	30.24	28
	30	SFW30S-6ST____LF	36.4	31.24	29
*	31	SFW31S-6ST____LF	37.4	32.24	30
*	32	SFW32S-6ST____LF	38.4	33.24	31

CAT. NO. SFW (n) S - 6 ST ____ LF

SERIES _____

NO. OF CONTACTS _____

STRAIGHT TYPE _____

FOR CIC _____

VARIATION _____

STM : FOR AUTOMATIC MOUNTING (SMT)
WITH MOUNTING PLATE



ST : FOR AUTOMATIC MOUNTING (SMT)
WITHOUT MOUNTING PLATE

PACKAGE STYLE _____

LEAD FREE _____

NOTES

1. THIS PRODUCT IS THE CONNECTOR, DESIGNED TO TERMINATE CIC AND COPE WITH AUTOMATIC MOUNTING (SMT).
2. SEE PART DRAWINGS FOR DIMENSIONS A.B.C.
3. PLEASE CONSULT US IN CASE OF USING PARTS WITH * MARK

mat'l. code				surface 58 / tolerance ISO 1302 ✓ ISO 406 ISO 1101		projection 		product family 58SF		CODE JP	
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm 		title CAT. NO. TABLE FOR 1mm SPACING SMT CONNECTOR (CAT.No.SFW__S-6ST____LF)			
A	J05-0377	H.T	2005-6-22	angles	linear						
B	J05-0547	H.T	2005-8-30			scale 		dwg no sheet 1 of 1 size JSA 96521 A4			
C	J06-0430	H.T	2006-10-19								
D	J07-0407	H.T	2007-8-9	dr	engr			type Product Customer Drawing			
				chr	appd						
sheet index	revision	D	1								Rev. D

B

B

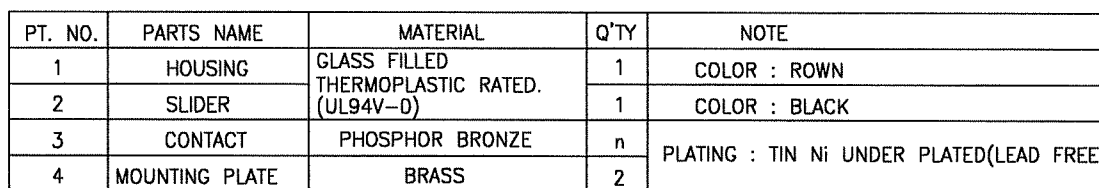
C

C



- C



D



n : NO. OF CONTACTS

NOTES

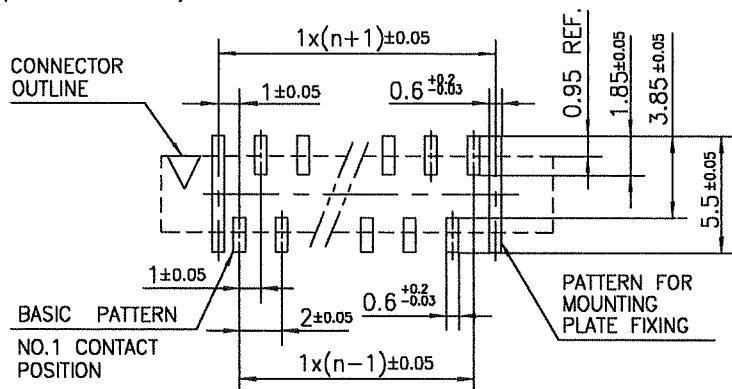1. THIS PRODUCT IS THE CONNECTOR DESIGNED TO TERMINATE CIC AND COPES WITH AUTOMATIC MOUNTING (SMT).
2. FLATNESS OF CONTACT TERMINAL AND MOUNTING PLATE MUST BE WITHIN TOLERANCE IN Z PORTION DETAILED DRAWING.
3. THIS DIMENSION IS SPACE FOR THE NOZZLE OF MOUNTER.
4. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-00B
5. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A REFLOW SOLDERING OVEN.

[illegible]

CAT. NO. & DIMENSIONS

(NOTE4)	NO. OF CONTACTS (n)	CAT. NO. (NOTE2)	DIMENSIONS (NOTE3)		
			D ± 5	E ± 0.3	F ± 0.1
	4	SFW4S-6ST_E1LF	28.4	24	—
	5	SFW5S-6ST_E1LF	28.4	24	—
	6	SFW6S-6ST_E1LF	28.4	24	—
*	7	SFW7S-6ST_E1LF	28.4	24	—
	8	SFW8S-6ST_E1LF	28.4	24	—
*	9	SFW9S-6ST_E1LF	28.4	24	—
	10	SFW10S-6ST_E1LF	28.4	24	—
	11	SFW11S-6ST_E1LF	28.4	24	—
*	12	SFW12S-6ST_E1LF	36.4	32	28.4
	13	SFW13S-6ST_E1LF	36.4	32	28.4
	14	SFW14S-6ST_E1LF	36.4	32	28.4
	15	SFW15S-6ST_E1LF	36.4	32	28.4
	16	SFW16S-6ST_E1LF	48.4	44	40.4
	17	SFW17S-6ST_E1LF	48.4	44	40.4
*	18	SFW18S-6ST_E1LF	48.4	44	40.4
*	19	SFW19S-6ST_E1LF	48.4	44	40.4
	20	SFW20S-6ST_E1LF	48.4	44	40.4
*	21	SFW21S-6ST_E1LF	48.4	44	40.4
	22	SFW22S-6ST_E1LF	48.4	44	40.4
	23	SFW23S-6ST_E1LF	48.4	44	40.4
	24	SFW24S-6ST_E1LF	48.4	44	40.4
*	25	SFW25S-6ST_E1LF	48.4	44	40.4
	26	SFW26S-6ST_E1LF	48.4	44	40.4
*	27	SFW27S-6ST_E1LF	60.4	56	52.4
	28	SFW28S-6ST_E1LF	60.4	56	52.4
	29	SFW29S-6ST_E1LF	60.4	56	52.4
	30	SFW30S-6ST_E1LF	60.4	56	52.4
*	31	SFW31S-6ST_E1LF	60.4	56	52.4
*	32	SFW32S-6ST_E1LF	60.4	56	52.4

CAT. NO. SFW (n) S - 6 ST - - - LF

SERIES SFW

NO. OF CONTACTS (n)

STRAIGHT TYPE S

FOR CIC - 6

VARIATION ST

STM : FOR AUTOMATIC MOUNTING (SMT) WITH MOUNTING PLATE

ST : FOR AUTOMATIC MOUNTING (SMT) WITHOUT MOUNTING PLATE


PACKAGE STYLE LF

LEAD FREE

NOTES

- THIS PRODUCT IS THE CONNECTOR DESIGNED TO TERMINATE CIC AND COPE WITH AUTOMATIC MOUNTING (SMT).
- THIS CATALOG NO. INDICATES PLASTIC TAPE PACKAGED CONNECTOR.
- SEE PART DRAWINGS FOR DIMENSIONS D~F.
- PLEASE CONSULT US IN CASE OF USING PARTS WITH * MARK.

mat'l. code				surface 58 / tolerance ISO 1302 ✓ ISO 406 ISO 1101		projection		product family 58SF		CODE JP	
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm		title			
A	J05-0377	H.T	2005-6-22	angles linear		mm		CAT. NO. TABLE FOR PLASTIC TAPE PACKAGED 1mm SPACING SMT CONN. (CAT.No.SFW__S-6ST_E1LF)			
B	J05-0547	H.T	2005-8-30			scale X					
C	J06-0430	H.T	2006-10-19								
D	J07-0407	H.T	2007-8-9	dr		FCI		dwg no sheet 1 of 1 size			
				engr				JSA 96524 A4			
				chr				type Product Customer Drawing			
				appd							
sheet index	revision	D	1							Rev. D	

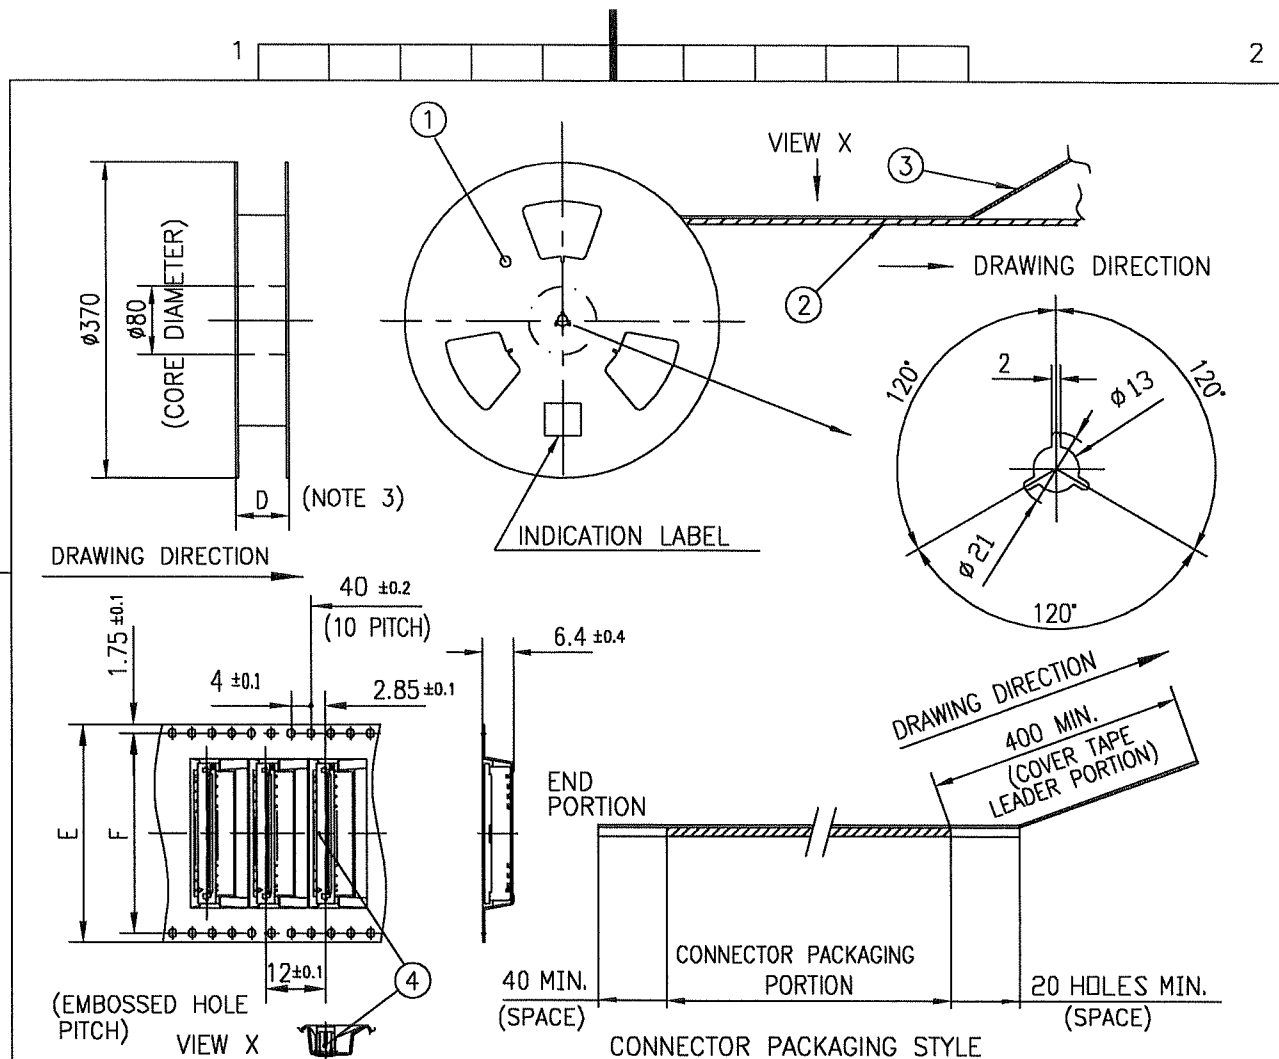

PT. NO.	PARTS NAME	CAT. NO.	MATERIAL	Q'TY	NOTE
1	REEL	_____	CARDBOARD	1	COLOR:GRAY
2	PLASTIC (EMBOSS) TAPE	_____	PET	_____	COLOR:TRANSPARENCY
3	COVER	_____	POLYESTER	_____	COLOR:TRANSPARENCY
4	CONNECTOR	SFW__S-6ST__LF	SEE ATTACHED DWG.	1000	_____


NOTES

- THIS IS PLASTIC TAPE PACKAGED CONNECTOR USED FOR CIC AND COPS WITH AUTOMATIC MOUNTING (SMT).
- SEE JIS C 0806 (PACKING OF ELECTRONIC COMPONENTS ON CONTINUOUS TAPES (SURFACE MOUNTING DEVICES)) FOR SHAPE AND DIMENSIONS OF PLASTIC (EMBOSS) TAPE AND REEL.
- D DIMENSION IS PORTION OF THE CORE.

mat'l. code				surface 58	tolerance	projection	product family	CODE
				ISO 1302	ISO 406	ISO 1101	58SF	JP
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm	title	
A	J05-0377	H.T	6/22/05	angles	linear	±5	PLASTIC TAPE PACKAGED	
B	J06-0430	H.T	10/19/06	±5'			1mm SPACING SMT CONNECTOR	
						scale X	(CAT.No.SFW__S-6ST_E1LF)	
				dr	engr	chr	dwg no	sheet 1 of 1
							JSA 96525	size A4
				appd			type Product Customer Drawing	
sheet index	revision	B	sheet 1					Rev. B

RECOMMENDED CABLE (CIC)

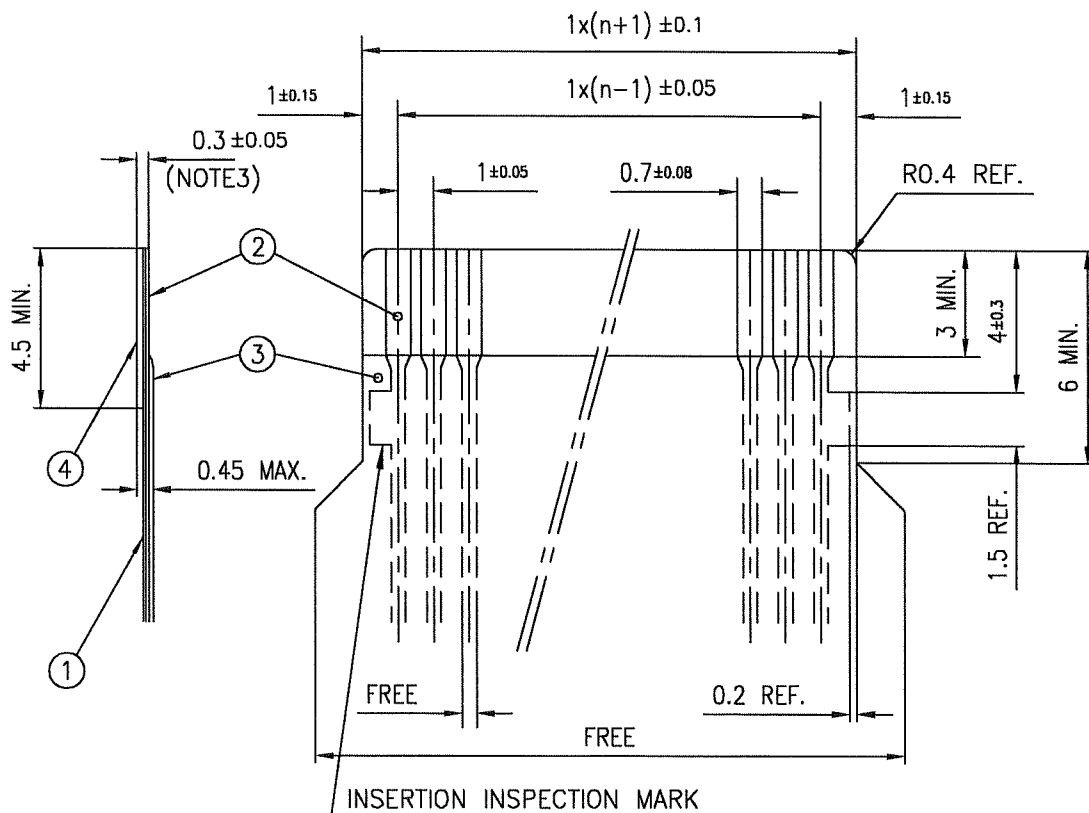n : NO. OF CONDUCTOR



PT. NO.	PARTS NAME	MATERIAL	THICKNESS (μm)	
1	BASE FILM	POLYESTER OR EQUAL	75	25
2	CONDUCTOR	CARBON PASTE OVER SILVER PASTE	10 MIN.	
3	OVERLAY	POLYIMIDE OR POLYESTER OR EQUAL		
4	SUPPORTING TAPE	POLYESTER OR POLYIMIDE OR EQUAL	188	250

NOTES

1. NO BURR AT EACH PORTION.
2. NO PEELING IN COMMON USE.
3. TOTAL THICKNESS LIMIT OF EACH MATERIAL (INCLUDING ADHESIVE AGENT) IS SPECIFIED.

mat'l. code				surface 58 ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection mm		product family 58SF		CODE JP	
ltr				ecn no		dr		date		title RECOMMENDED CABLE (CAT.No.SFW__S-6ST__)			
AA				J04-0333		H.T		Oct.13/04					
AB				J06-0430		H.T		10/19/06					
										scale X			
										dwg no		sheet 1 of 1	
										JSA 93904		size A4	
										type		Product Customer Drawing	
sheet index				revision		AB						Rev. AB	
1				1									