







3 PIN

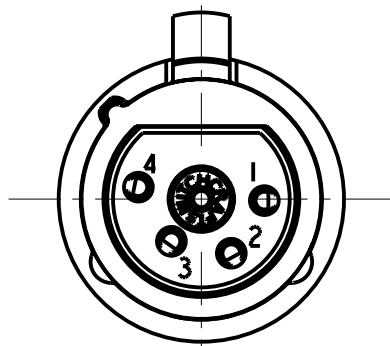


4 PIN

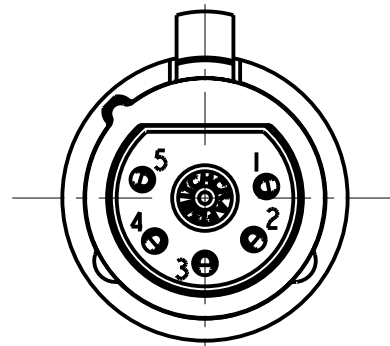

5 PIN

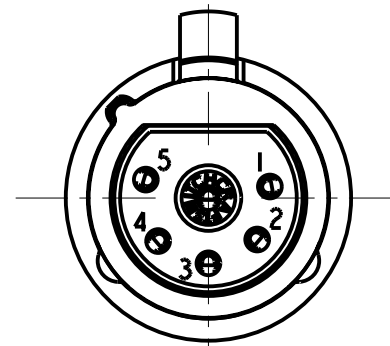

6 PIN

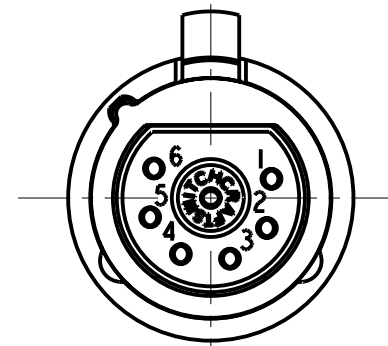

7 PIN

STANDARD SERIES

INSERT SCREW - STAINLESS STEEL
FLEX SCREW - STEEL, NICKEL PLATED
HOUSING - ZINC, NICKEL PLATED
SHELL - STAINLESS STEEL
LATCH BUTTON - ZINC, NICKEL PLATED
LATCH SPRING - STAINLESS STEEL
CONTACTOR - BERYLLIUM COPPER, NICKEL PLATE
TUBULAR INSULATOR - MYLAR
SOLDER TERMINAL - BRASS, ELECTRO TIN
FLEX RELIEF - HI-FAX, BLACK - STANDARD (X)
CLAMP PLATE - STAINLESS STEEL
INSULATORS - POLYESTER, GREEN
CONTACTS - BRASS, SILVER PLATED

- A F
- COLOR OF FLEX RELIEF
01 = BROWN
02 = RED
03 = ORANGE
04 = YELLOW
05 = GREEN
06 = BLUE
07 = VIOLET
08 = GRAY
09 = WHITE
11 = TAN
12 = PINK
13 = DARK BLUE
- CONTACT PLATING
BLANK = SILVER (STANDARD)
AU = GOLD
- HOUSING FINISH (SEE NOTE 2)
BLANK = NICKEL PLATE (STANDARD)
BX = BLACK, RoHS (X)
- LATCH TYPE
BLANK = STANDARD LATCHLOCK
D = FAS-DIS-CONNECT DETENT (SEE FIGURE 3)
- FLEX RELIEF SIZE
BLANK = STANDARD SIZE (0.210 TO 0.300)
L = LARGE CABLES (0.300 TO .0328)
S = SMALL CABLES (0.105 TO 0.205)
- NO. OF CONTACTS:
3 = 3 CONTACTS
4 = 4 CONTACTS
5 = 5 CONTACTS
6 = 6 CONTACTS
7 = 7 CONTACTS

PROFESSIONAL SERIES

(X) SAME AS ABOVE EXCEPT
CONTACT PIN - PHOSPHOR BRONZE, GOLD OVER NICKEL
HOUSING - NON REFLECTIVE VEL-TONE FINISH
FLEX RELIEF - GRAY

OGP 22

(X) NO. OF CONTACTS:
3 = 3 CONTACTS

NOTE:

1. ALL DIMENSIONS REF. UNLESS OTHERWISE SPECIFIED.
- (X) 2. BLACK HOUSING AND INSERT WITH SATIN NICKEL PLATED LATCH.
- (X) 3. THIS PRODUCT IS RoHS COMPLIANT.



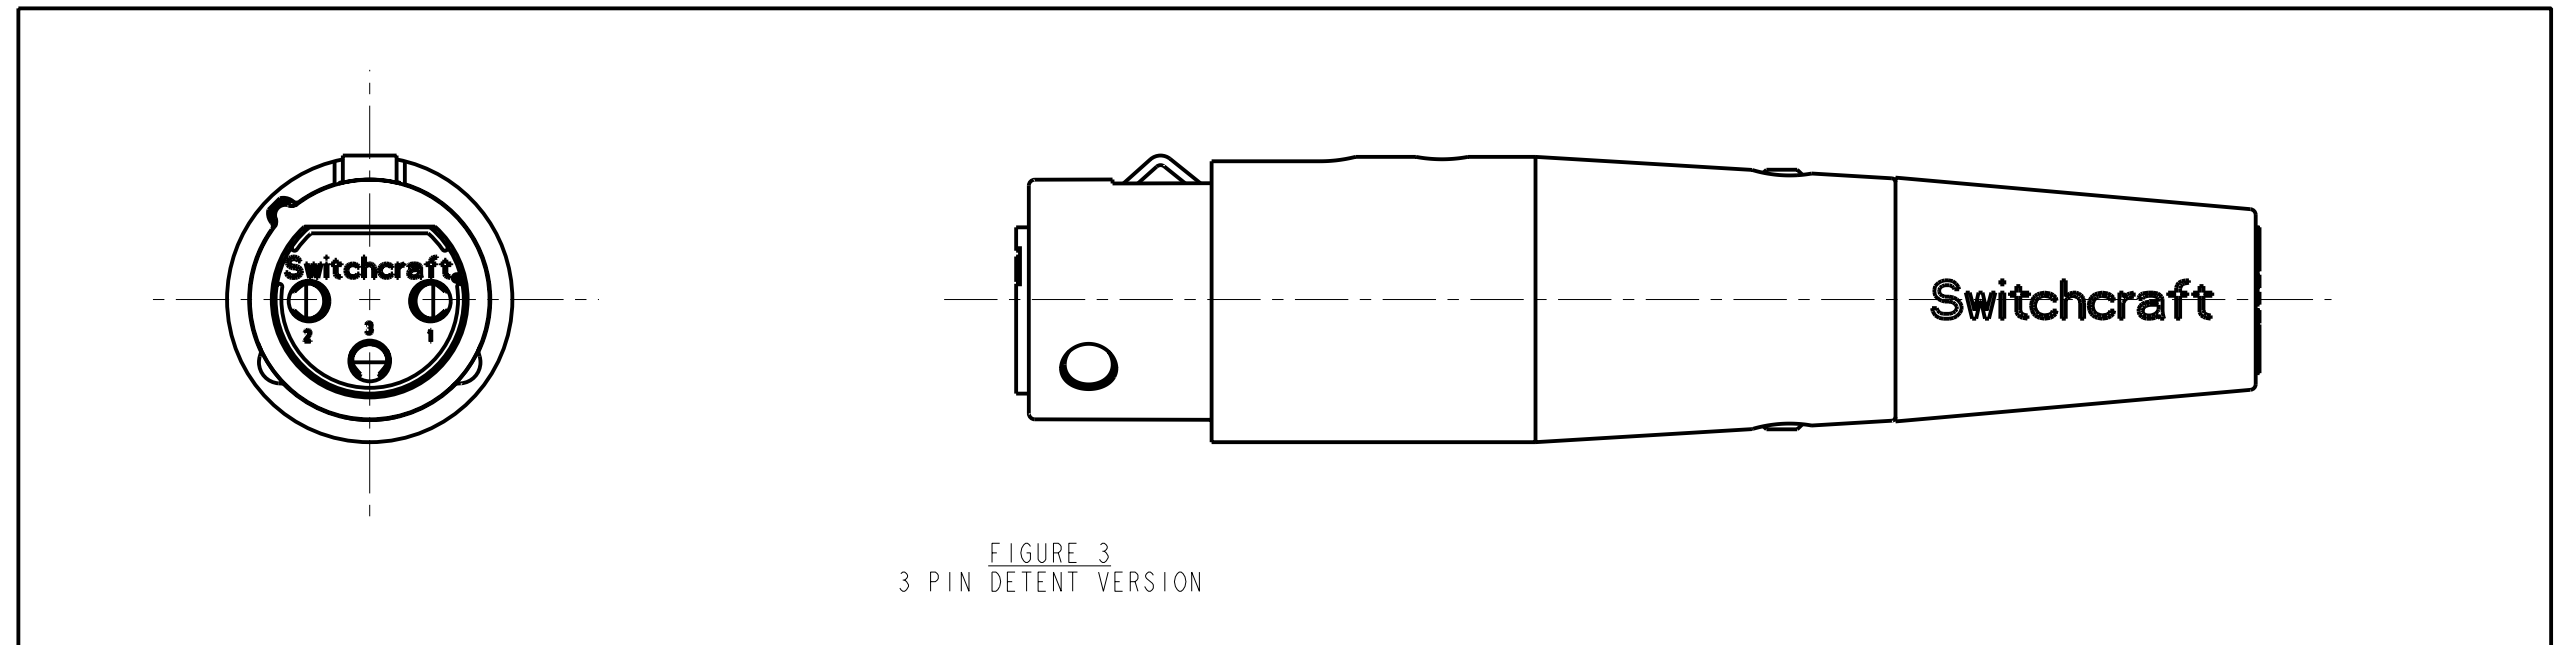


FIGURE 3
3 PIN DETENT VERSION

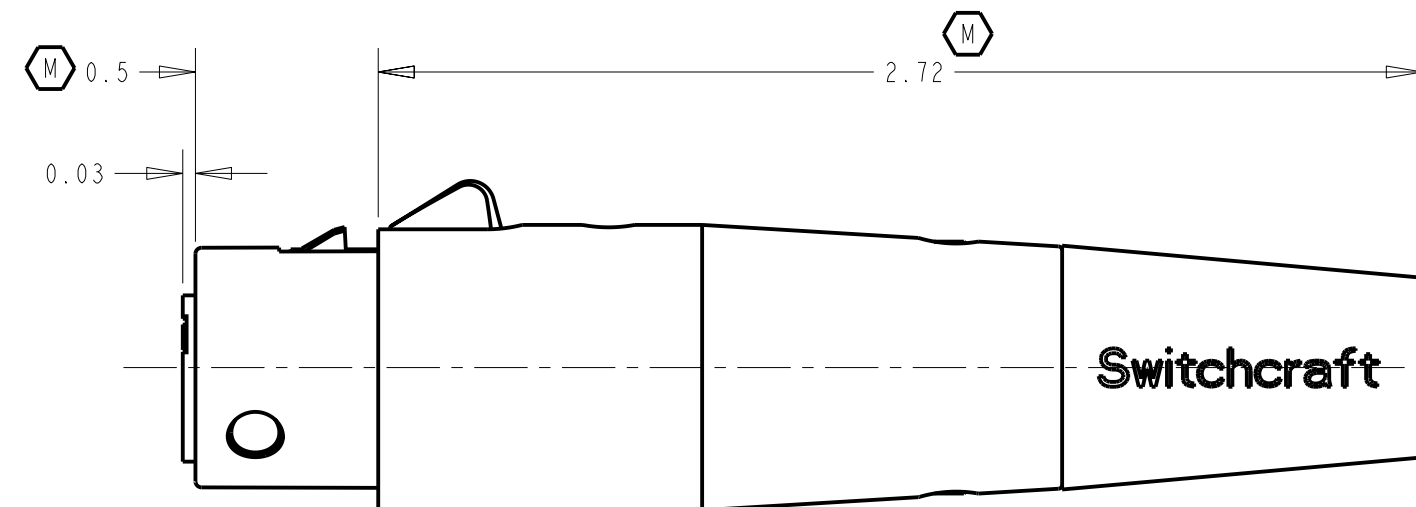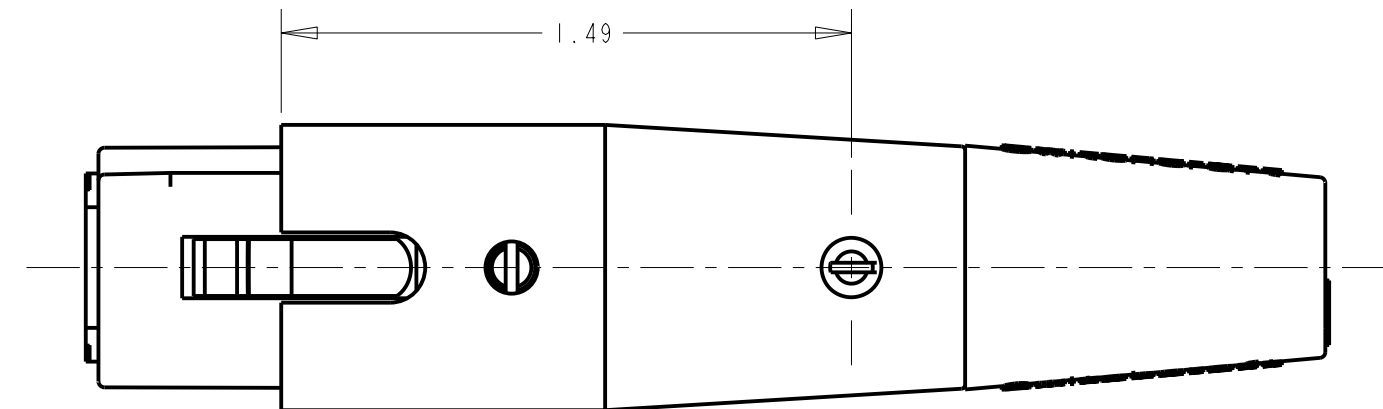

CUSTOMER DRAWING

						★ STAR SYMBOL DENOTES CRITICAL DIMENSION UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES - TWO PLACE DECIMALS ±0.01 - THREE PLACE DECIMALS ±0.005 - ANGLES ±1° - ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R. 2. FEATURES ON THE SAME CENTERLINE MUST BE ALIGNED WITHIN ±0.002 3. REMOVE ALL BURRS DO NOT SCALE DRAWING	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.								
							SIZE	WIDTH		MULT	LBS/M		TEMPER		
							FINISH SPEC No.				MATERIAL SPEC No.				
							FIRST USED ON			SCALE 2:1		Switchcraft®			
							DATE DRAWN	BY	CHKD	APVD					
							10-26-93	SG	SG 1-19-95	GHJ 1-19-95		SHEET OF			
							NAME				PART No.		REV		
						"A" SERIES FEMALE QG, ROHS				A_F_SERIES		X			
X2615810-17-07TJKTJK															
WECO #2253012-21-98MMEB															
V223536-12-98DAEB															
REVECO NUMBERDATEBYAPVD															
REVISIONS															

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Switchcraft:

[A5F](#) [A3F](#) [M3M](#) [A7F](#) [A4F](#) [A6F](#) [A3FL](#) [A3FPKG](#) [A3FS](#) [A4FL](#) [M5M](#) [A3FBXAU](#) [A4FBX](#) [A4FBXAU](#) [A5FBX](#)
[A5FBXAU](#) [A6FBX](#) [A6FBXAU](#) [A7FBX](#) [A7FBXAU](#) [A3FBX](#) [QGP322](#) [A4FD](#)