

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D2	REVISED PER ECR-16-011494	20JUN2017	NK	CX

D

C

B


A

D


C

B


A

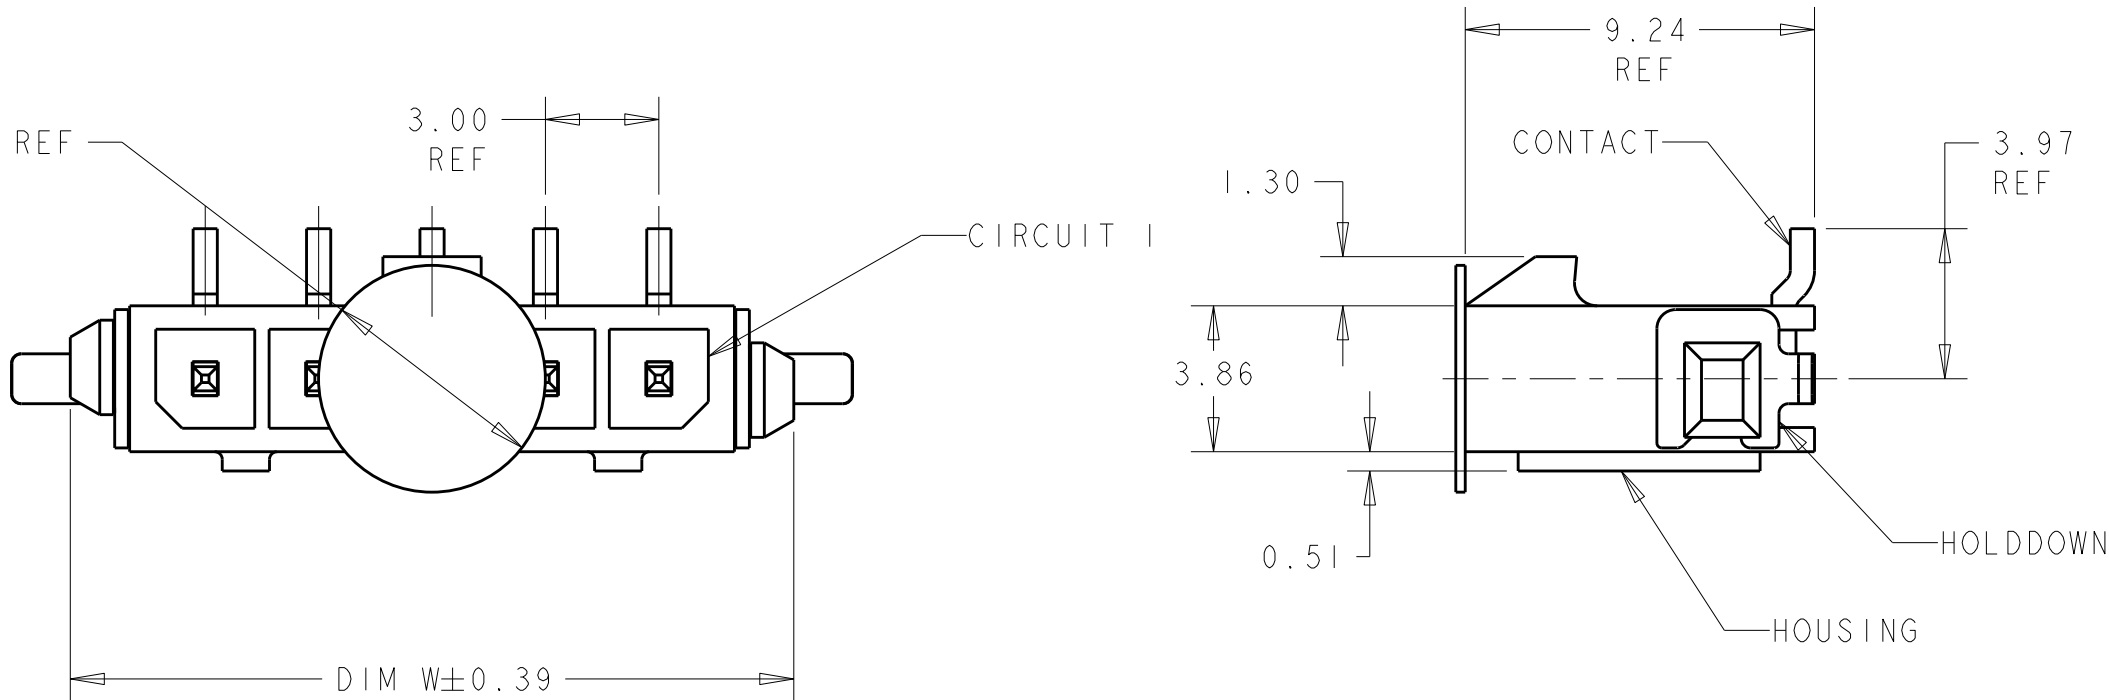

- 1 MATERIAL: CONTACTS - BRASS
HOUSING - UL 94V-0 RATED HIGH TEMP NYLON, COLOR BLACK.
HOLDDOWNS: - PHOSPHOR BRONZE.
- 2 PLATING: CONTACTS - 0.38µm MINIMUM GOLD ON MATING END,
2.54µm MINIMUM TIN LEAD ON SOLDER TAILS, BOTH OVER
1.27µm MINIMUM NICKEL.
HOLDDOWNS: 2.54µm MINIMUM TIN-LEAD OVER 1.27µm MINIMUM NICKEL.
- 4 RECOMMENDED PC BOARD THICKNESS OF 1.57.
- 5 KAPTON VACUUM PICK UP BUTTON.
- 6 PLATING: CONTACTS - 0.38µm MINIMUM GOLD ON MATING END,
2.54µm MINIMUM MATTE TIN ON SOLDER TAILS, BOTH OVER
1.27µm MINIMUM NICKEL.
HOLDDOWNS: 2.54µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL.

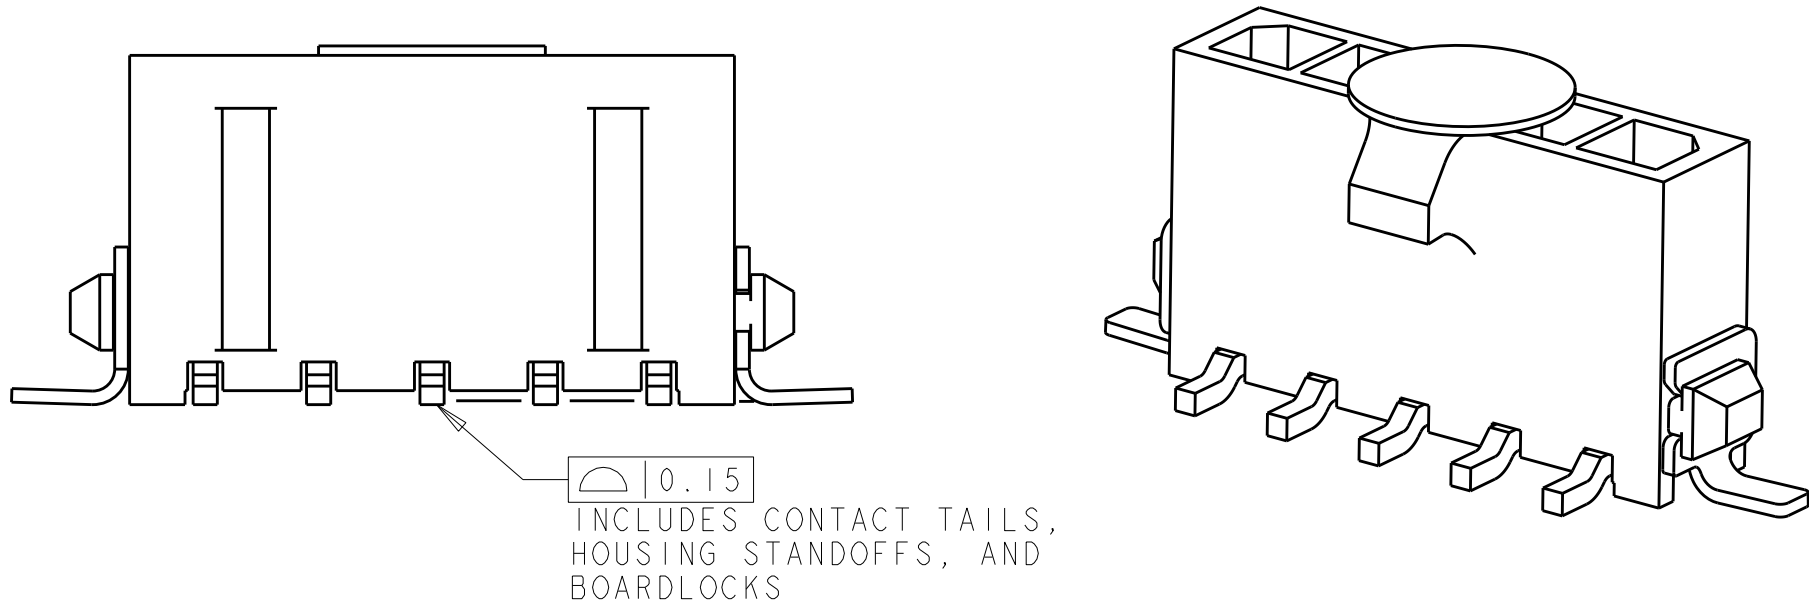

6	33.00	40.41	40.00	12	3-1445087-2
6	30.00	37.41	37.00	11	3-1445087-1
6	27.00	34.41	34.00	10	3-1445087-0
6	24.00	31.41	31.00	9	2-1445087-9
6	21.00	28.41	28.00	8	2-1445087-8
6	18.00	25.41	25.00	7	2-1445087-7
6	15.00	22.41	22.00	6	2-1445087-6
6	12.00	19.41	19.00	5	2-1445087-5
6	9.00	16.41	16.00	4	2-1445087-4
6	6.00	13.41	13.00	3	2-1445087-3
2	3.00	10.41	10.00	2	2-1445087-2
SUPERCEDED BY 3-1445087-2					
2	33.00	40.41	40.00	12	1-1445087-2
SUPERCEDED BY 3-1445087-1					
2	30.00	37.41	37.00	11	1-1445087-1
SUPERCEDED BY 3-1445087-0					
2	27.00	34.41	34.00	10	1-1445087-0
SUPERCEDED BY 2-1445087-9					
2	24.00	31.41	31.00	9	1-1445087-9
SUPERCEDED BY 2-1445087-8					
2	21.00	28.41	28.00	8	1-1445087-8
SUPERCEDED BY 2-1445087-7					
2	18.00	25.41	25.00	7	1-1445087-7
SUPERCEDED BY 2-1445087-6					
2	15.00	22.41	22.00	6	1-1445087-6
SUPERCEDED BY 2-1445087-5					
2	12.00	19.41	19.00	5	1-1445087-5
SUPERCEDED BY 2-1445087-4					
2	9.00	16.41	16.00	4	1-1445087-4
SUPERCEDED BY 2-1445087-3					
2	6.00	13.41	13.00	3	1-1445087-3
SUPERCEDED BY 2-1445087-2					
2	3.00	10.41	10.00	2	1-1445087-2
FINISH		DIM Z	DIM V	DIM W	NO. OF POSN
					PART NUMBER

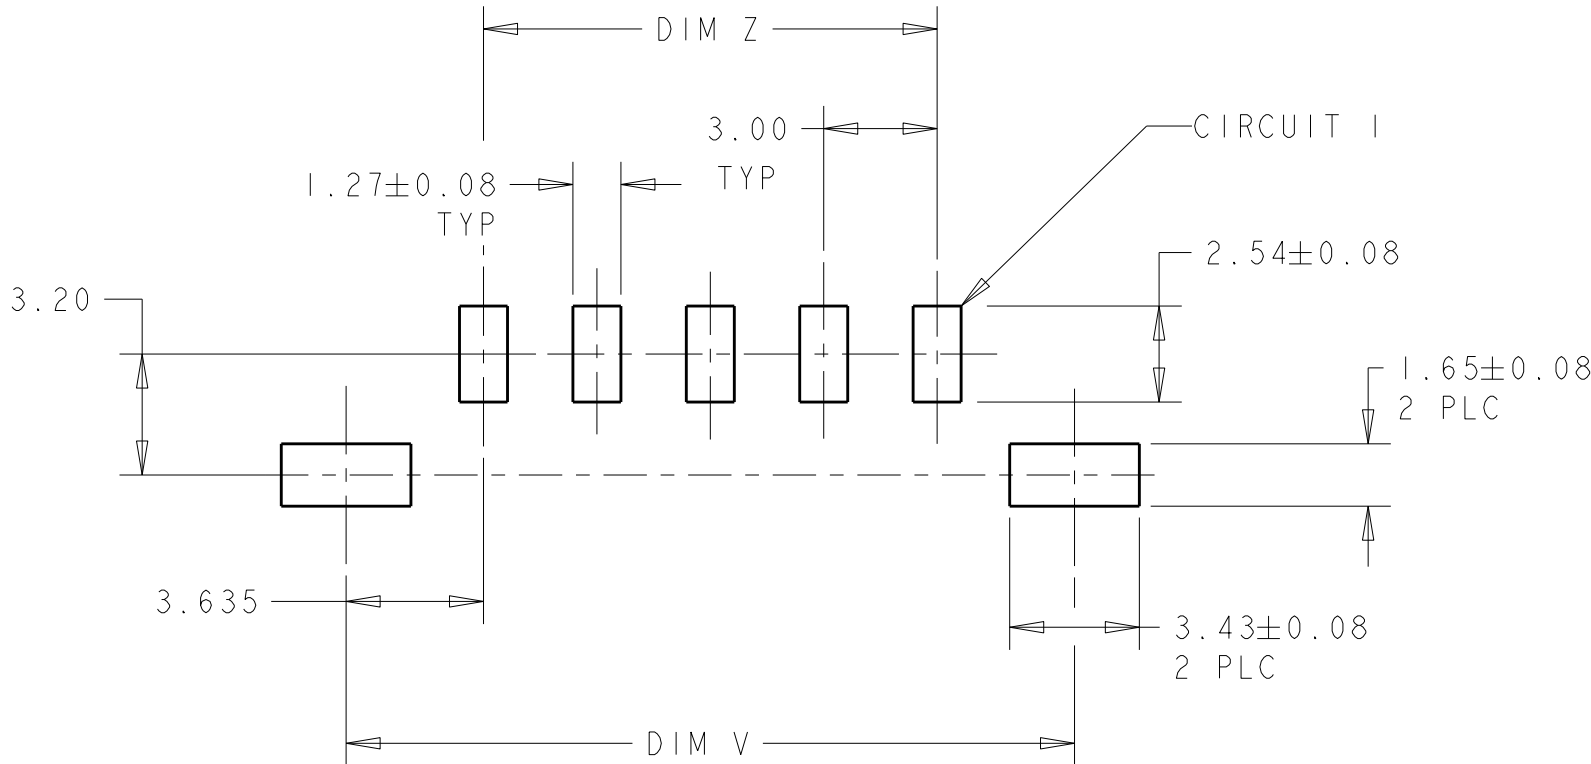

PCB LAYOUT COMPONENT SIDE 4

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN J.ROOT 09OCT2000

CHK K.WHLAKER 20-FEB-2001

APVD C.JONES 20-FEB-2001

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±0.13
3 PLC ±
4 PLC ±
ANGLES ±
FINISH SEE TABLE

PRODUCT SPEC -

APPLICATION SPEC -

WEIGHT -

CUSTOMER DRAWING

STE

TE Connectivity

NAME VERTICAL SURFACE MOUNT HEADER ASSY, 15 MIC GOLD CONTACTS, SURFACE MOUNT, HOLDDOWNS, SGL ROW, MICRO MATE-N-LOK™

SIZE A2

CAGE CODE 00779

DRAWING NO. C-1445087

RESTRICTED TO -

SCALE 5:1

SHEET 1 OF 1

REV D2