

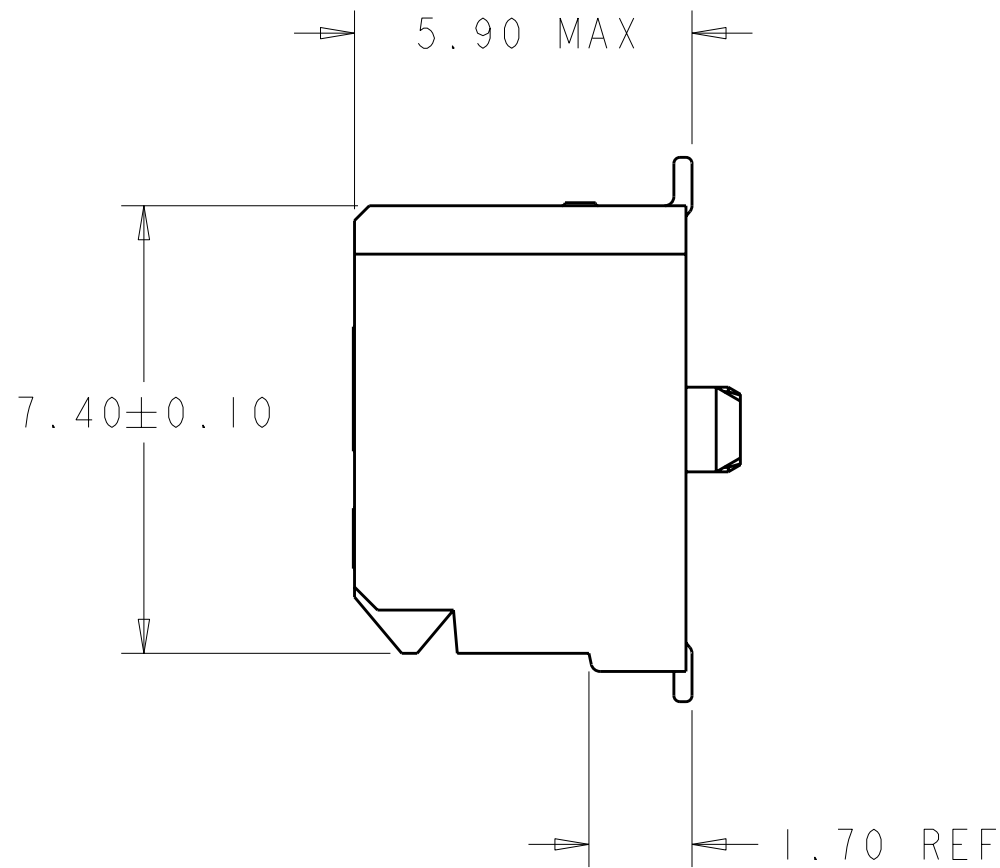
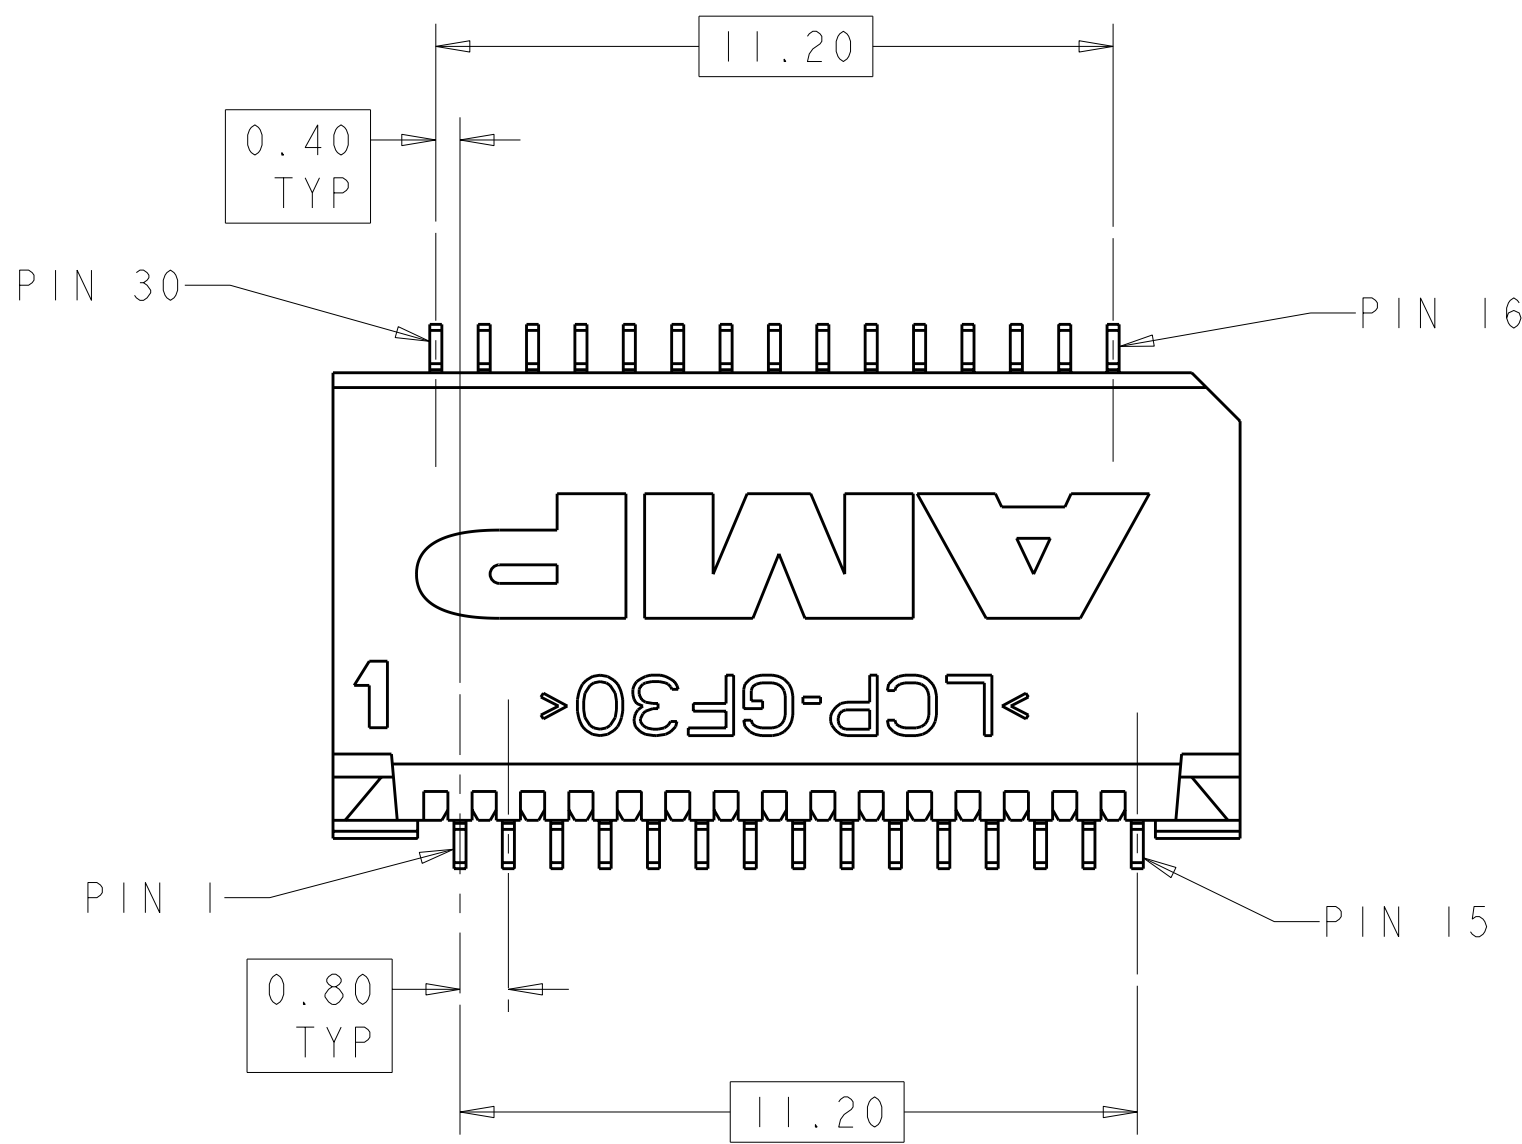
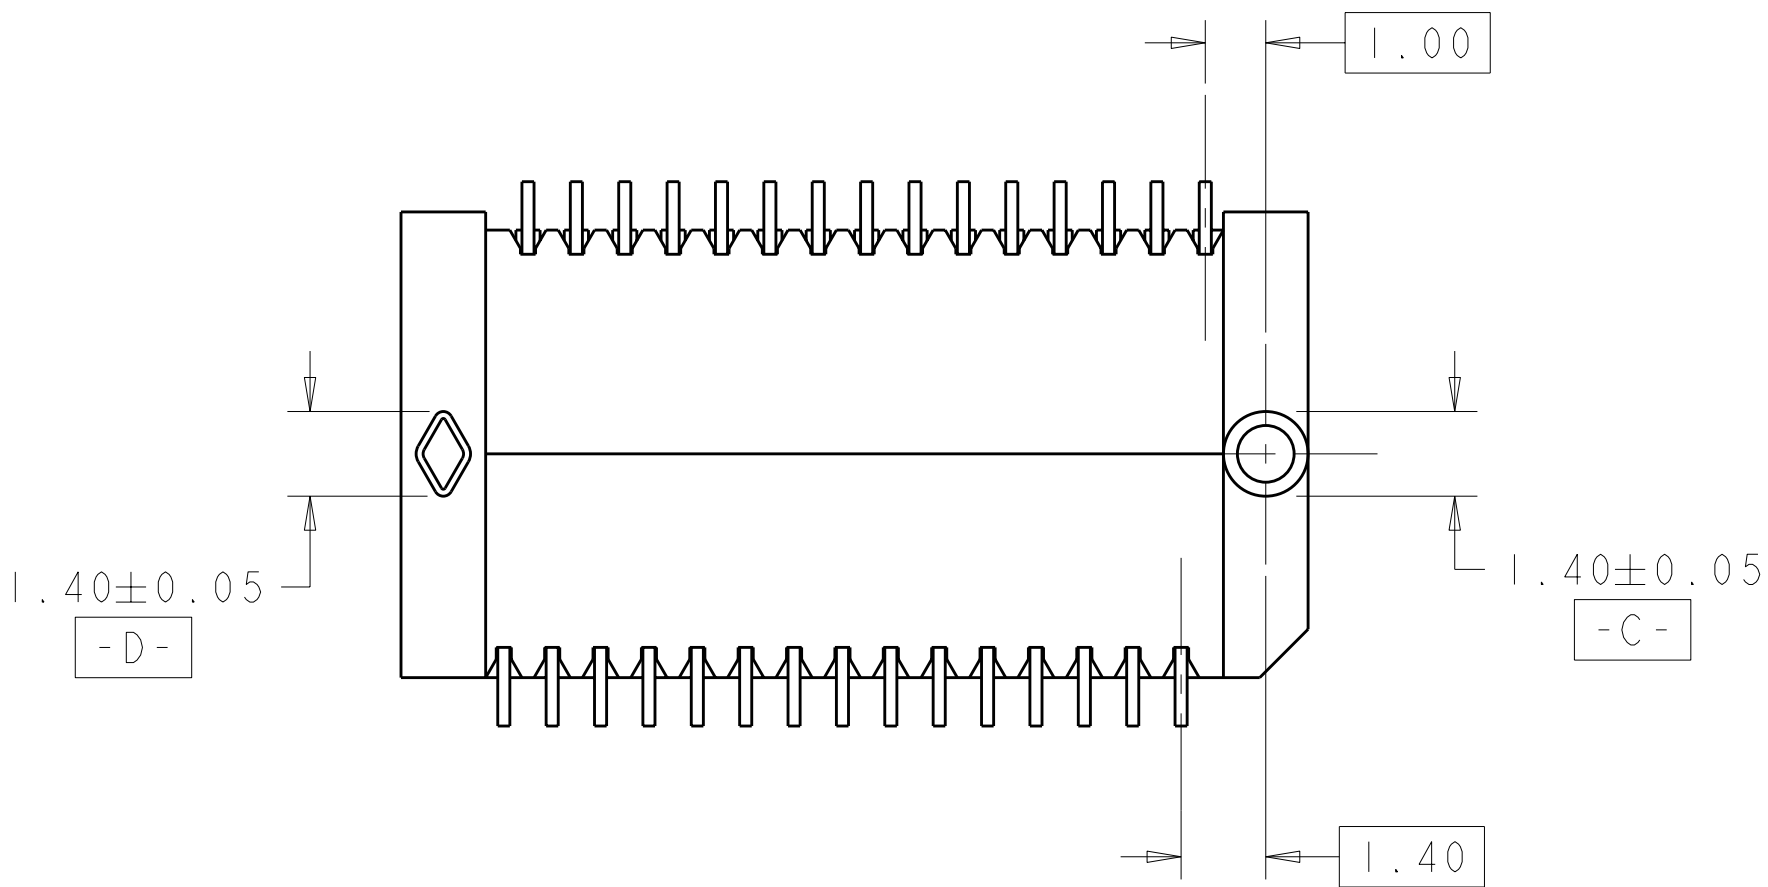
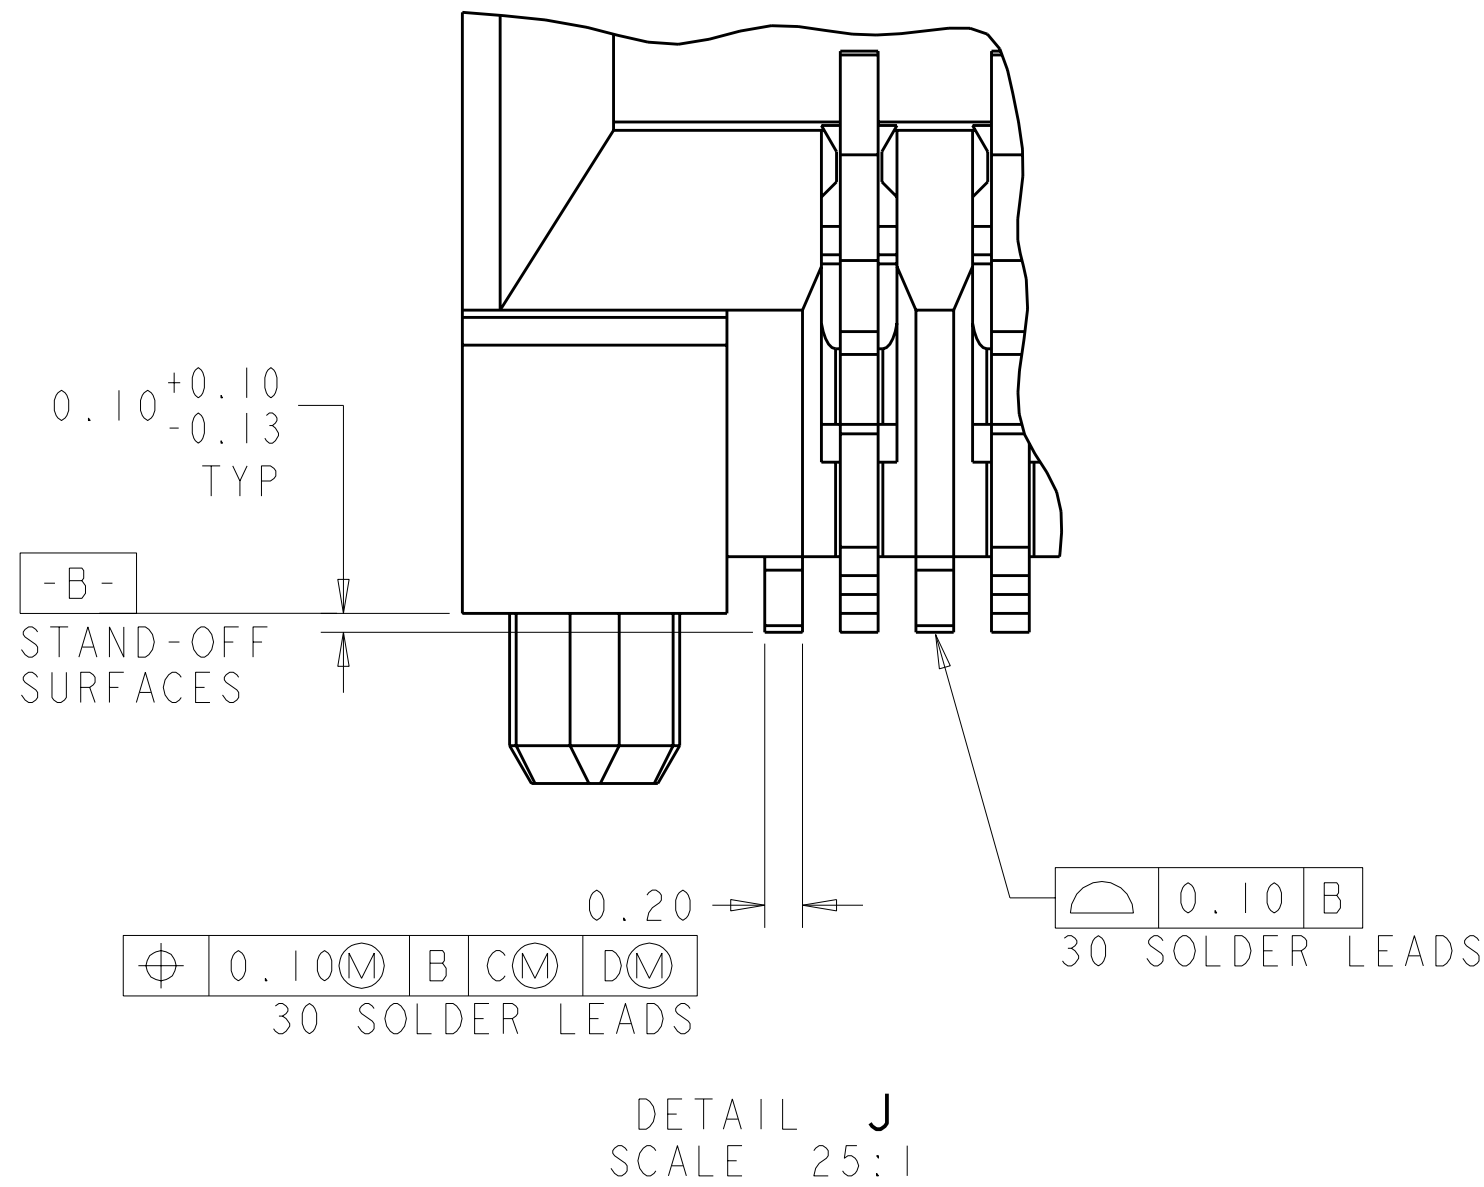
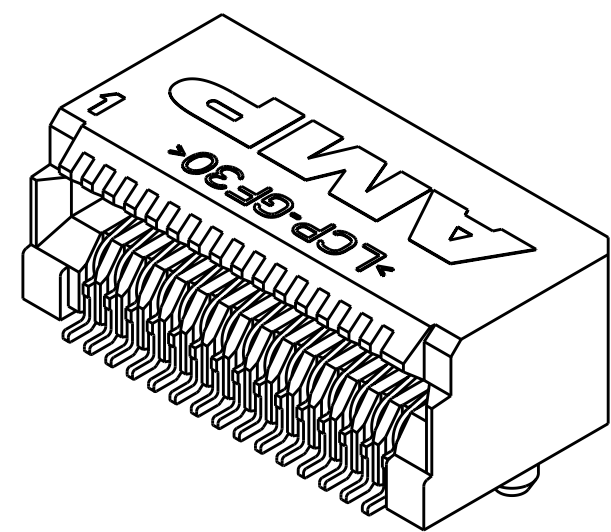


LOC		DIST		REVISIONS			
ES	00	P	LYR	DESCRIPTION	DATE	OWN	APVD
				G1	REVISED PER ECO-11-005027	14MAR2011	RK HMR

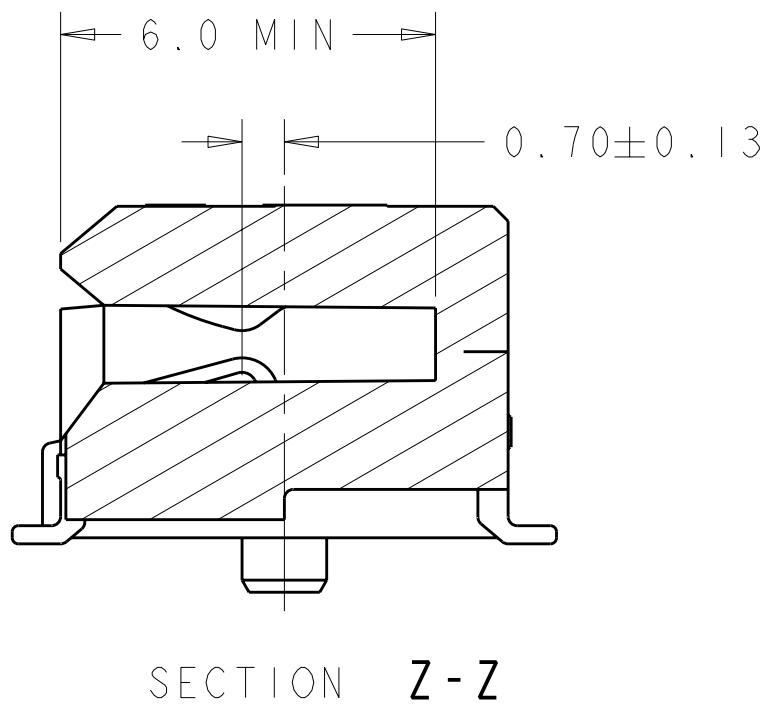


- PART COMPATABLE WITH XFP MSA. REFER TO THE SFP MSA FOR DIMENSIONS NOT SHOWN ON THIS PRINT.
- HOUSING: HIGH TEMPERATURE LCP, UL 94V-0 RATED, BLACK. CONTACT: PHOSPHOR BRONZE.
- CONTACTS: 0.00038 MIN GOLD IN CONTACT AREA, 0.00013 MIN GOLD ON SOLDER AREA, OVER 0.0038 MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.
- PACKAGED PIECES PER REEL.
- GROUND, POWER AND SIGNAL PAD ARRANGEMENT TO BE DETERMINED BY CUSTOMER.
- DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- CONTACTS: 0.00076 MIN GOLD IN CONTACT AREA, 0.00013 MIN GOLD ON SOLDER AREA, OVER 0.0038 MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.
- SOLDER MASK KEEP OUT AREA.
- CONTACTS: 0.00127 MIN GOLD IN CONTACT AREA, 0.00013 MIN GOLD ON SOLDER AREA, OVER 0.0038 MIN NICKEL UNDERPLATE ON ENTIRE CONTACT.

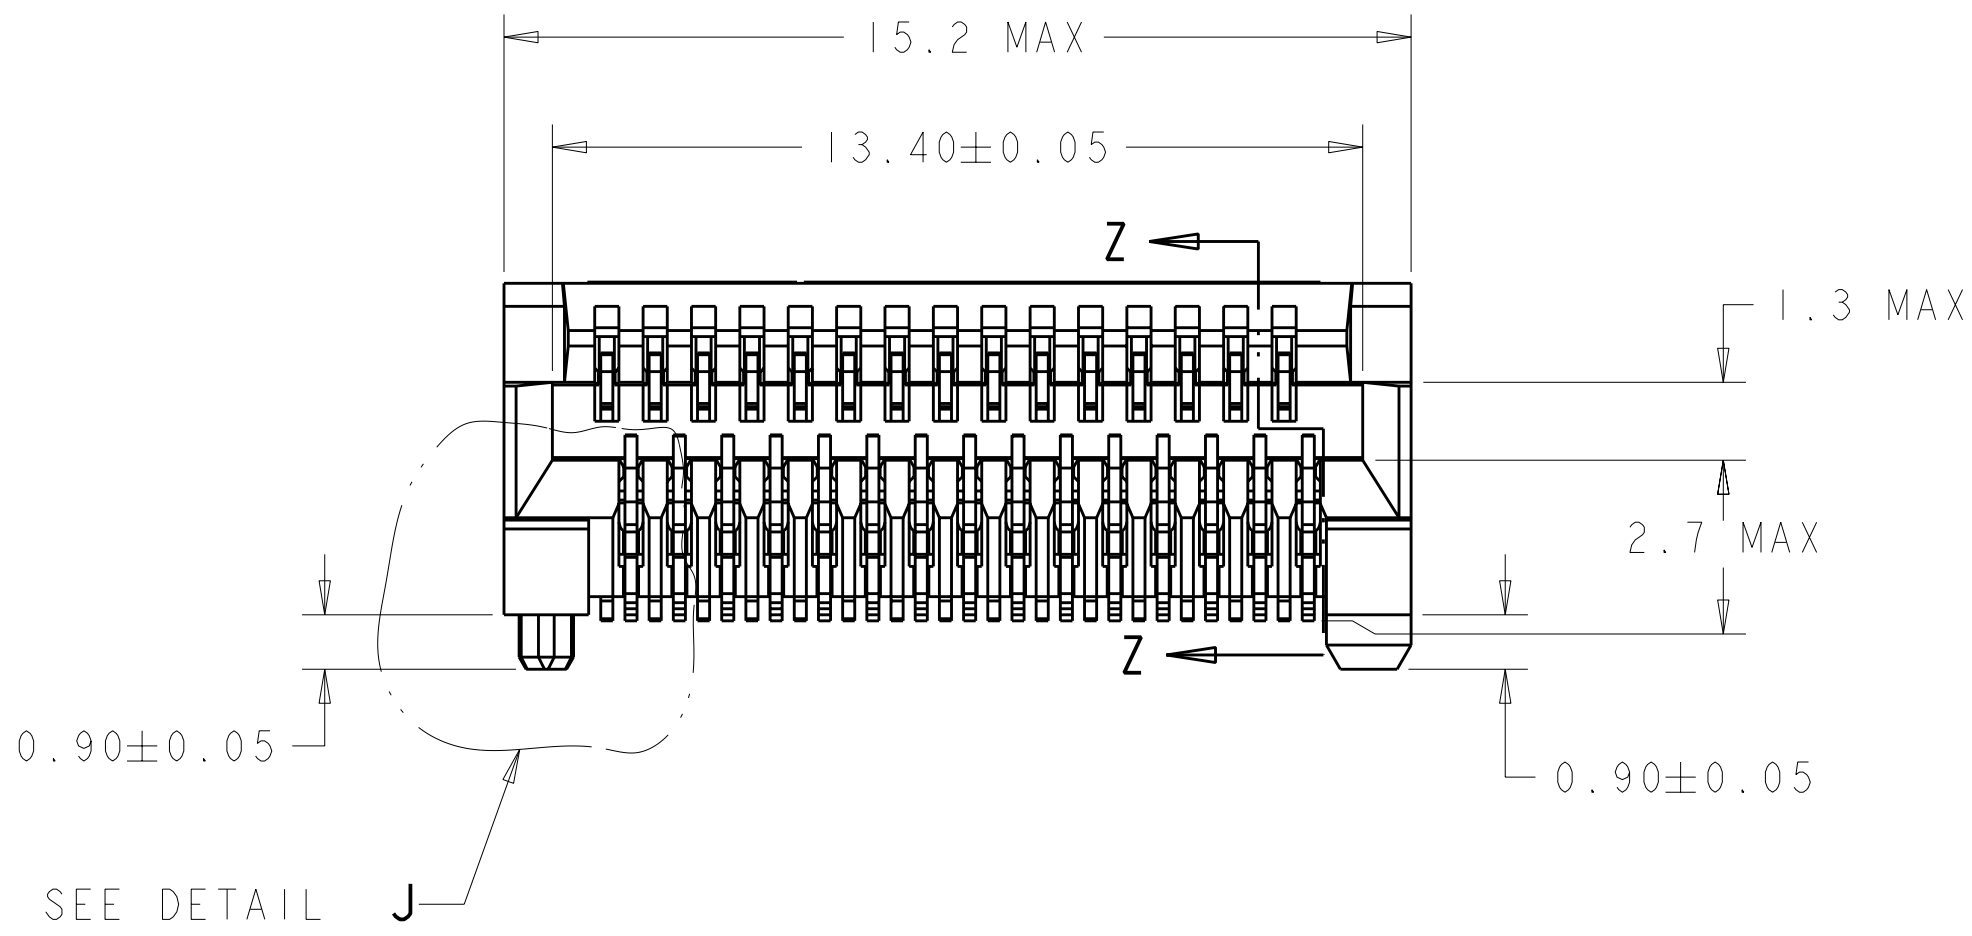


9	788862-3
7	788862-2
3	788862-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN J. GERACE 15JAN02	TE Connectivity	
DIMENSIONS:		CHK J. KOPPENHEFFER 15JAN02		
mm		APVD M. WALMSLEY 15JAN02	NAME PT CONNECTOR ASSEMBLY, 30 POSITION, XFP, RTANG, 0.8MM PITCH	
		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
		108-1949		
MATERIAL		APPLICATION SPEC	A100779C=788862	
		114-13017		
FINISH		WEIGHT	SCALE 8:1 SHEET 1 OF 2 REV G1	
SEE TABLE		CUSTOMER DRAWING		

LOC		DIST		REVISIONS			
ES	00	F	LYR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1	-	-	-

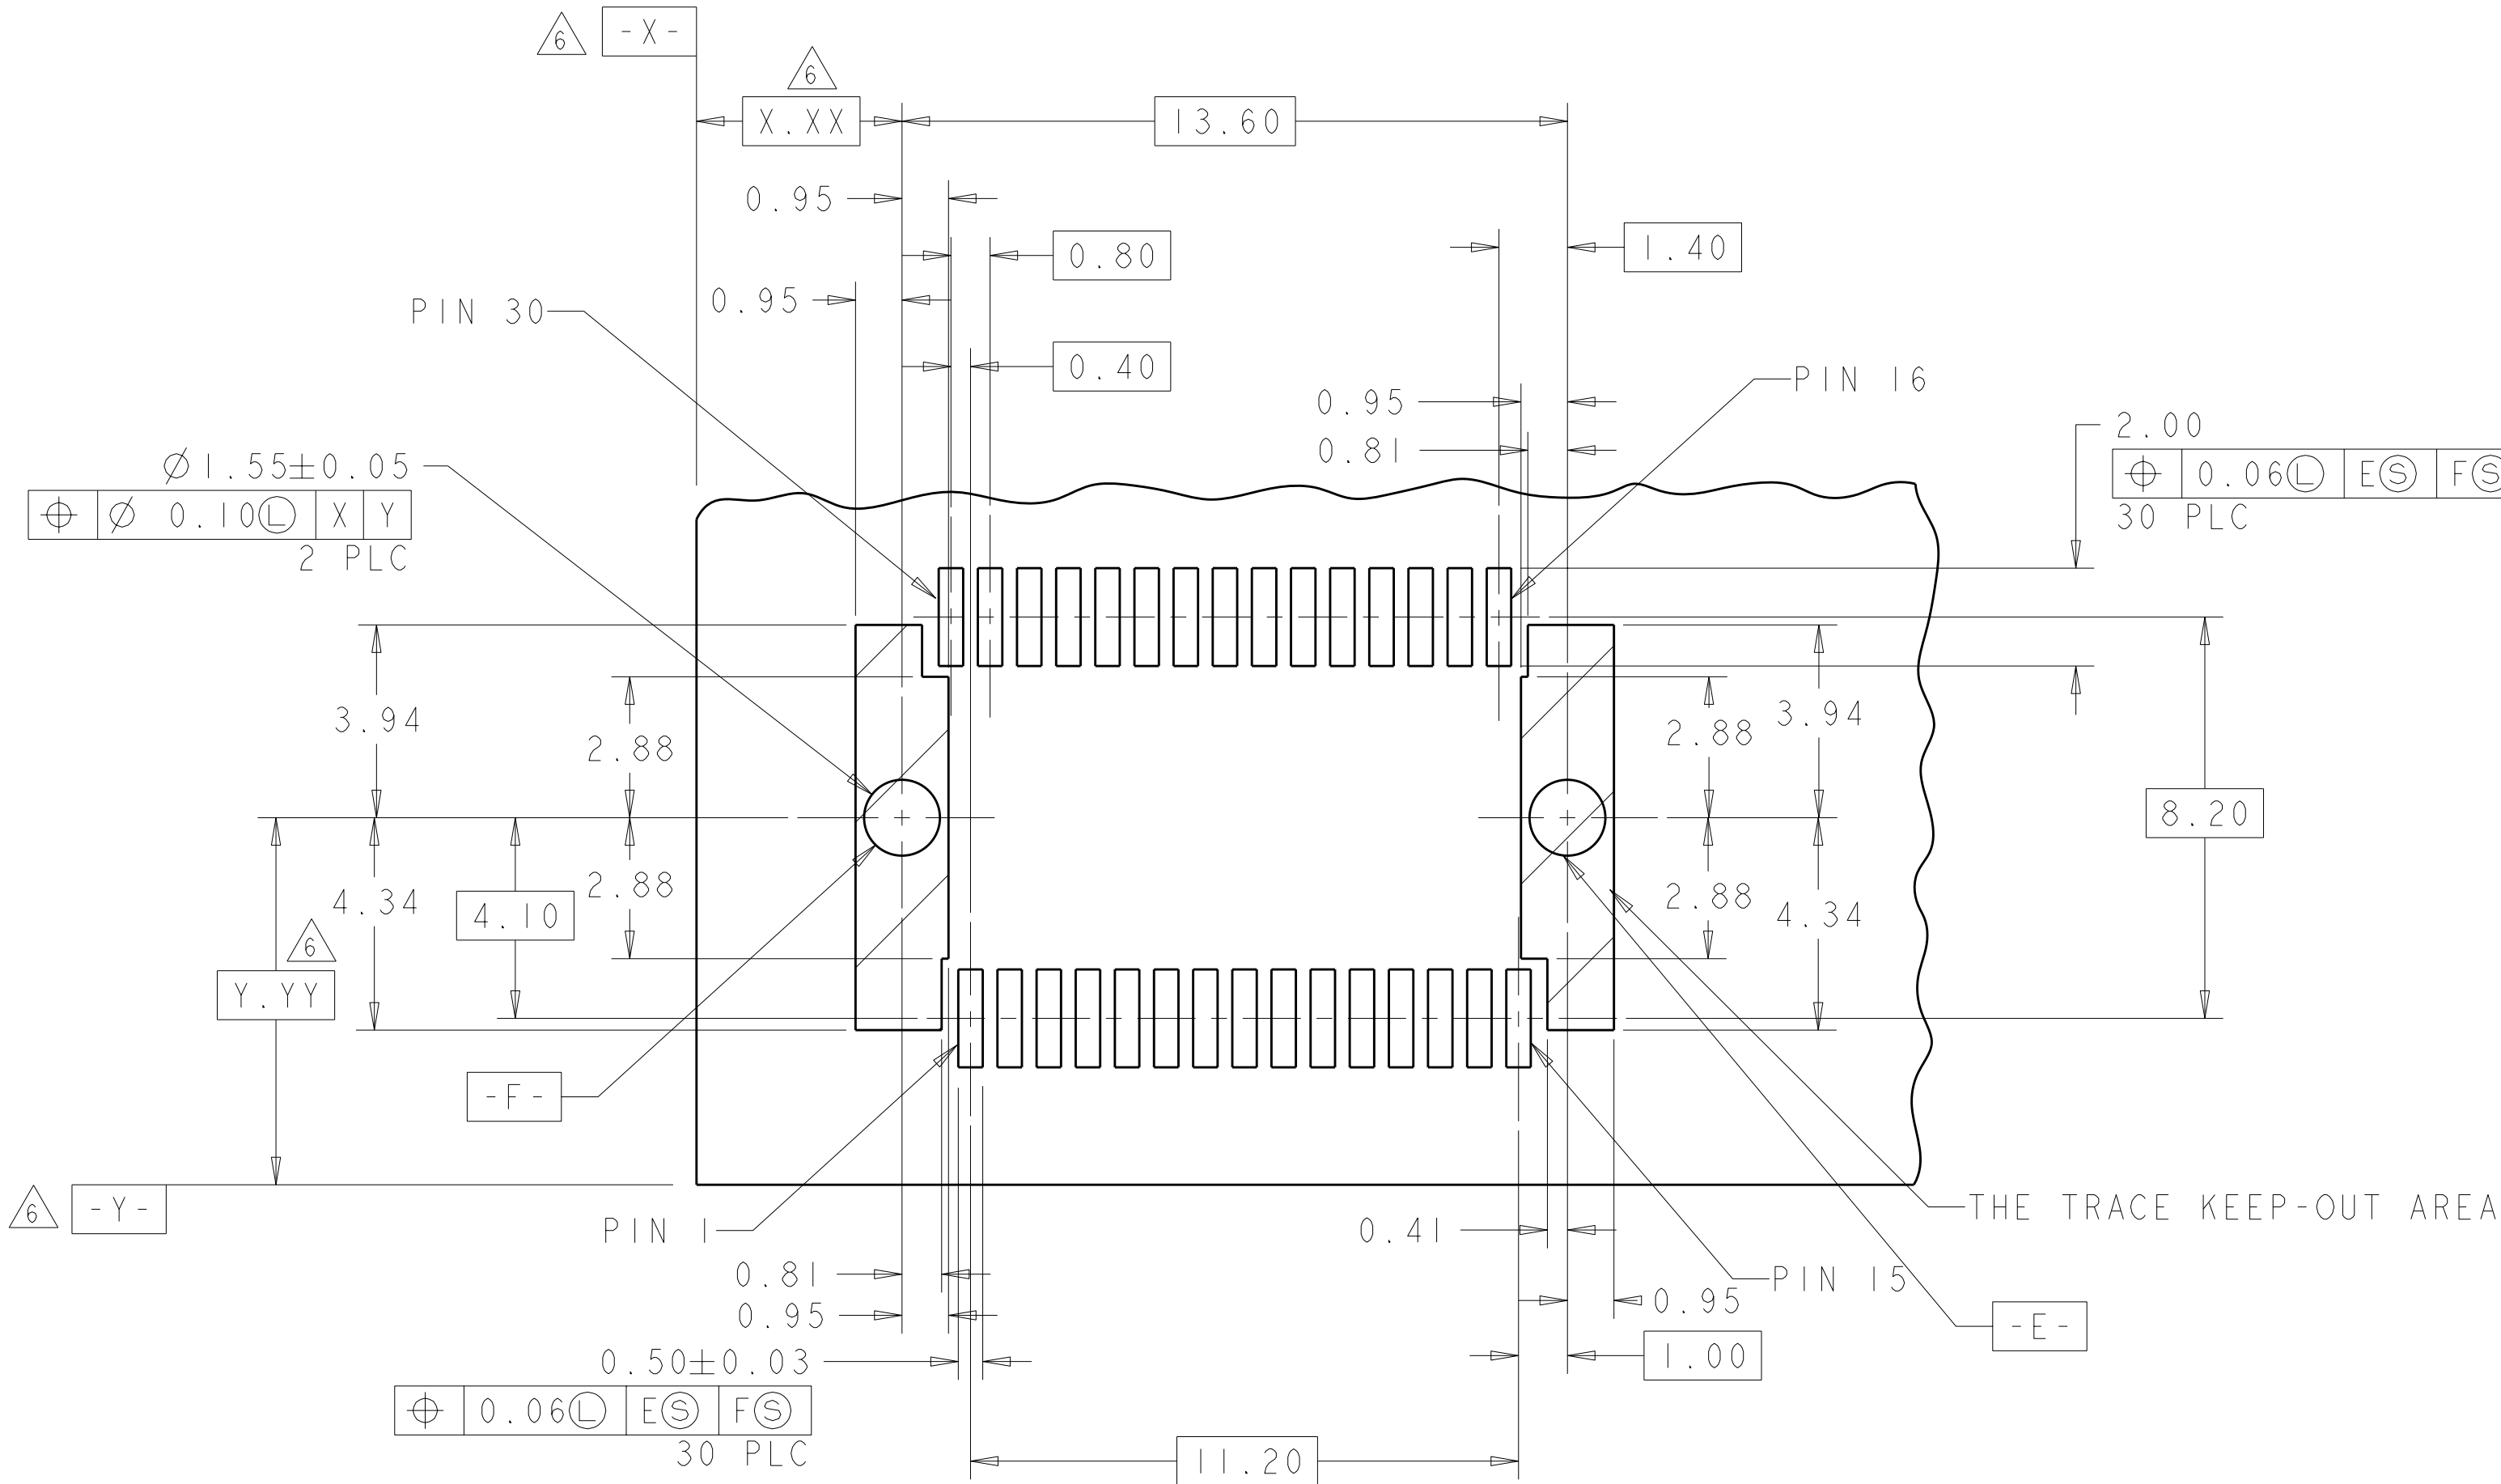


RECOMMENDED PCB LAYOUT DETAIL
CONNECTOR MOUNTING SIDE
SCALE 8:1

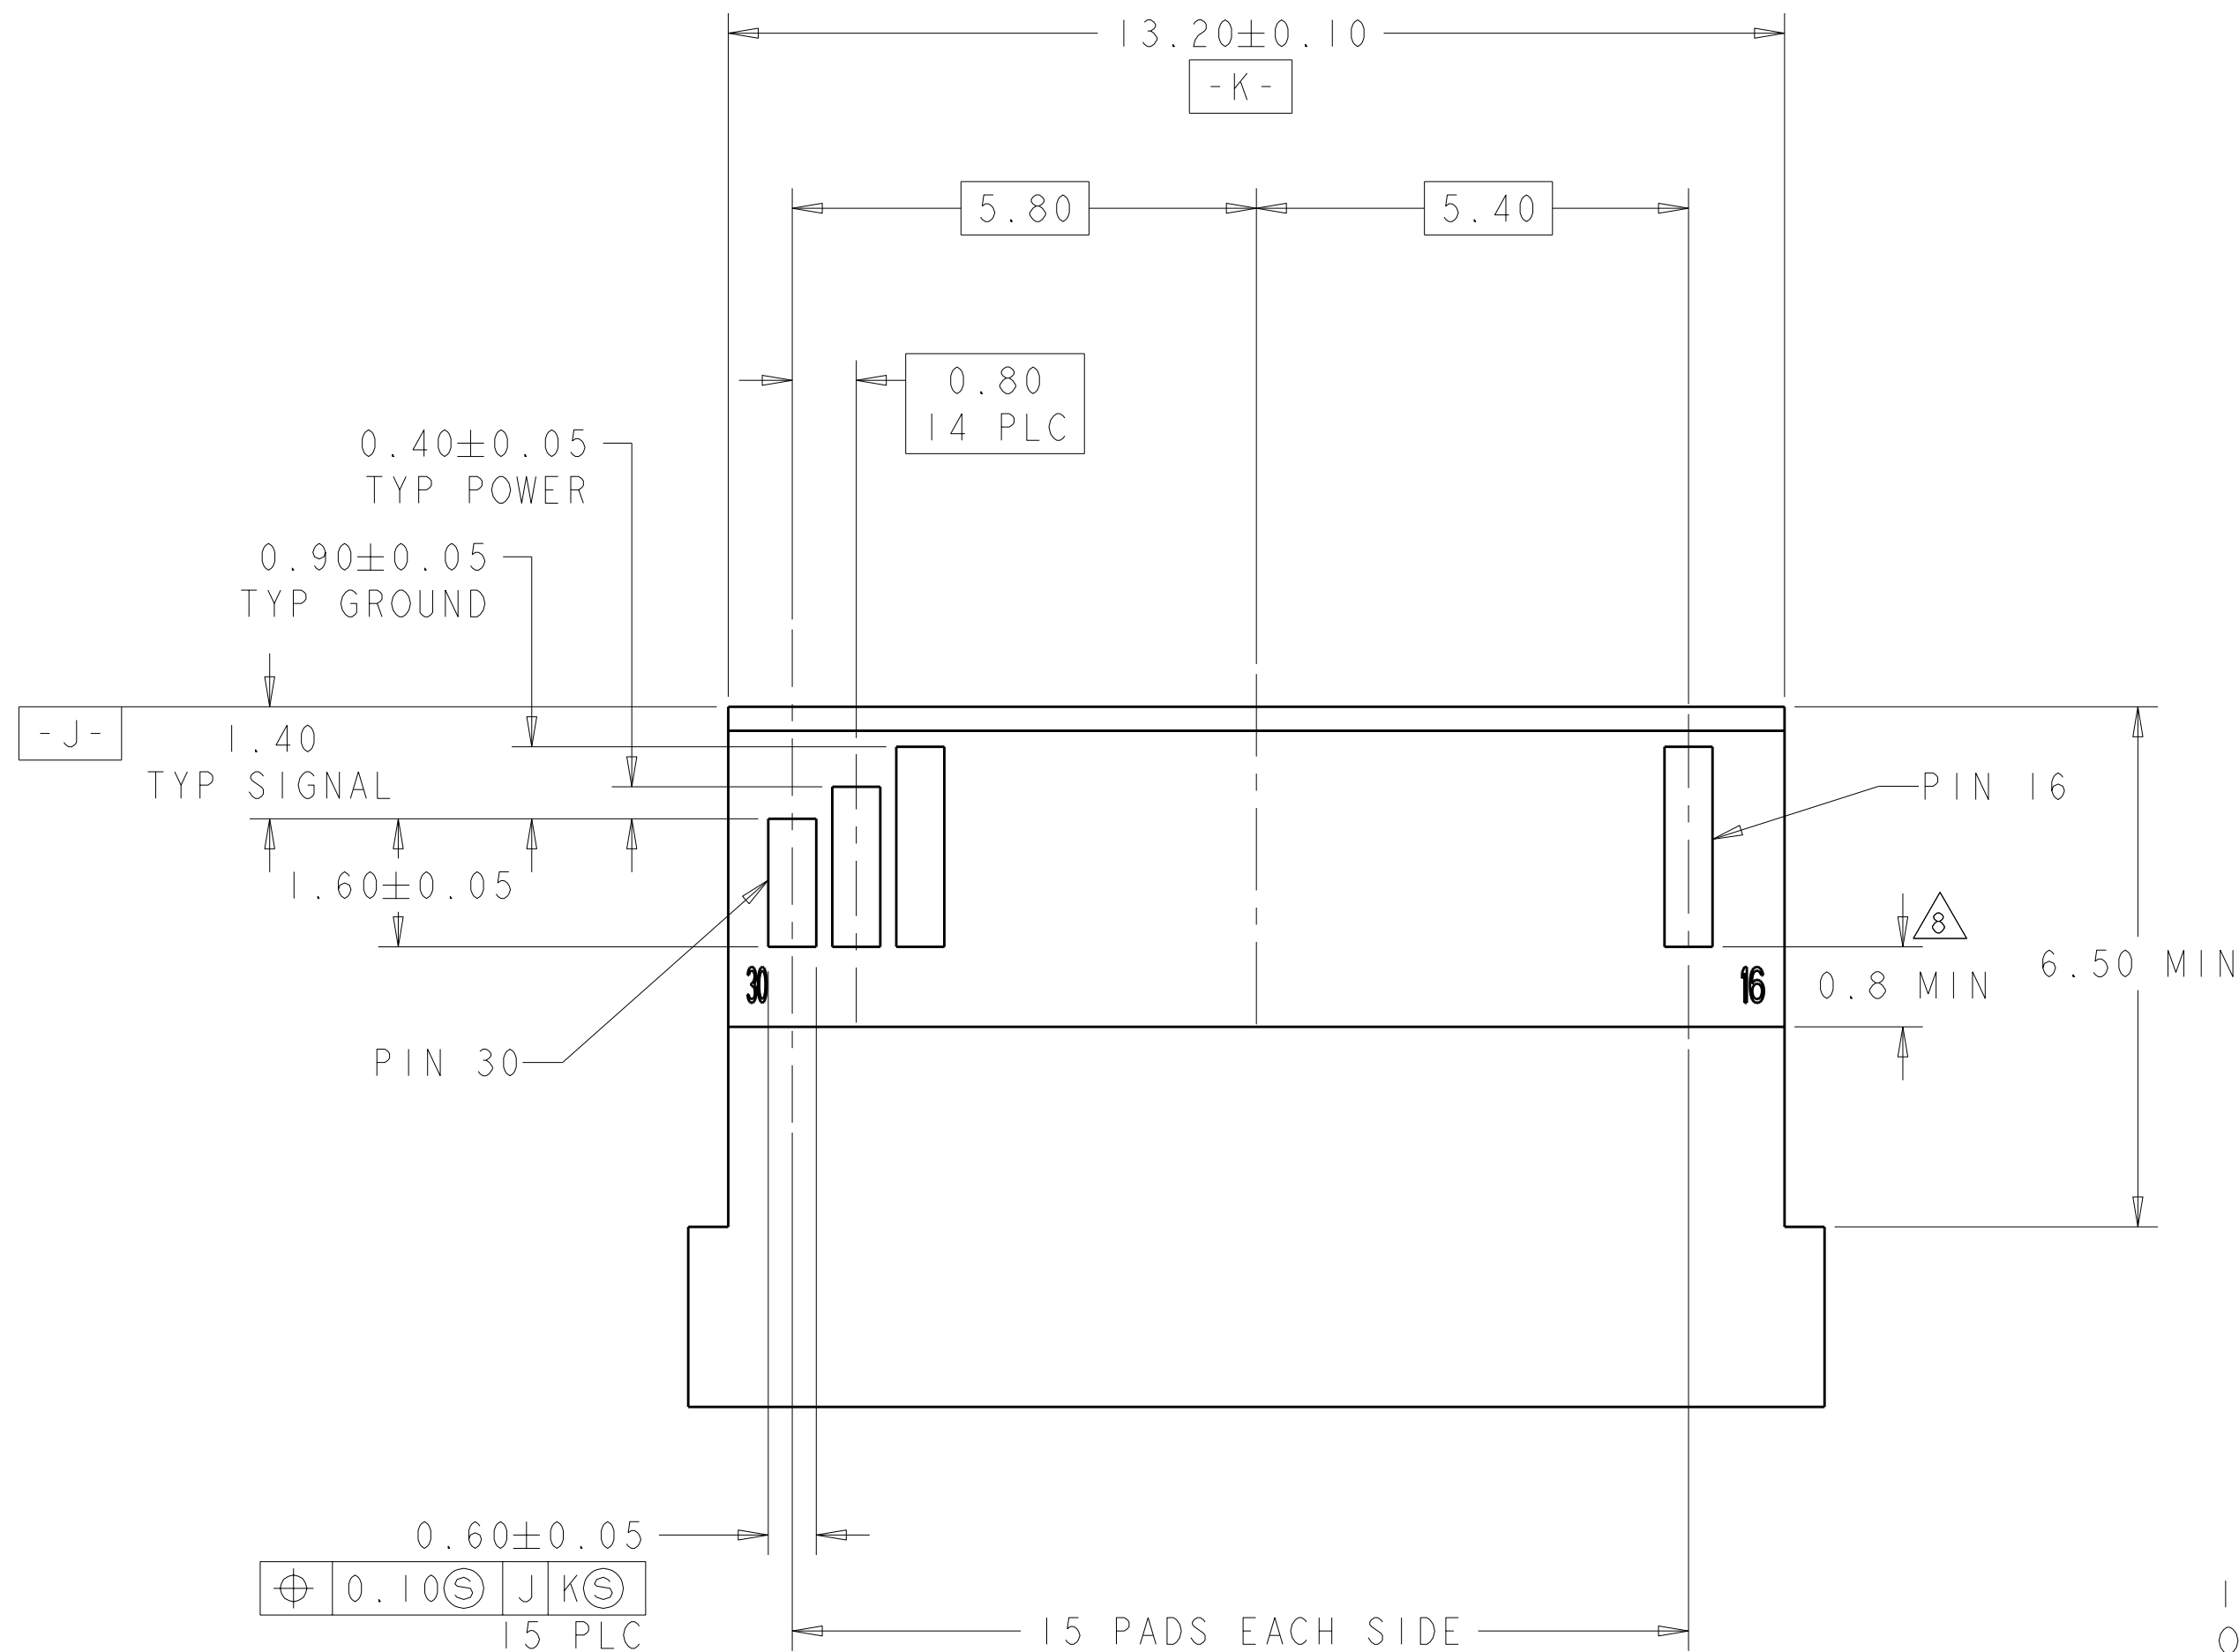

TOP VIEW

RECOMMENDED LAYOUT DETAIL
MATING PCB

SCALE 12:1

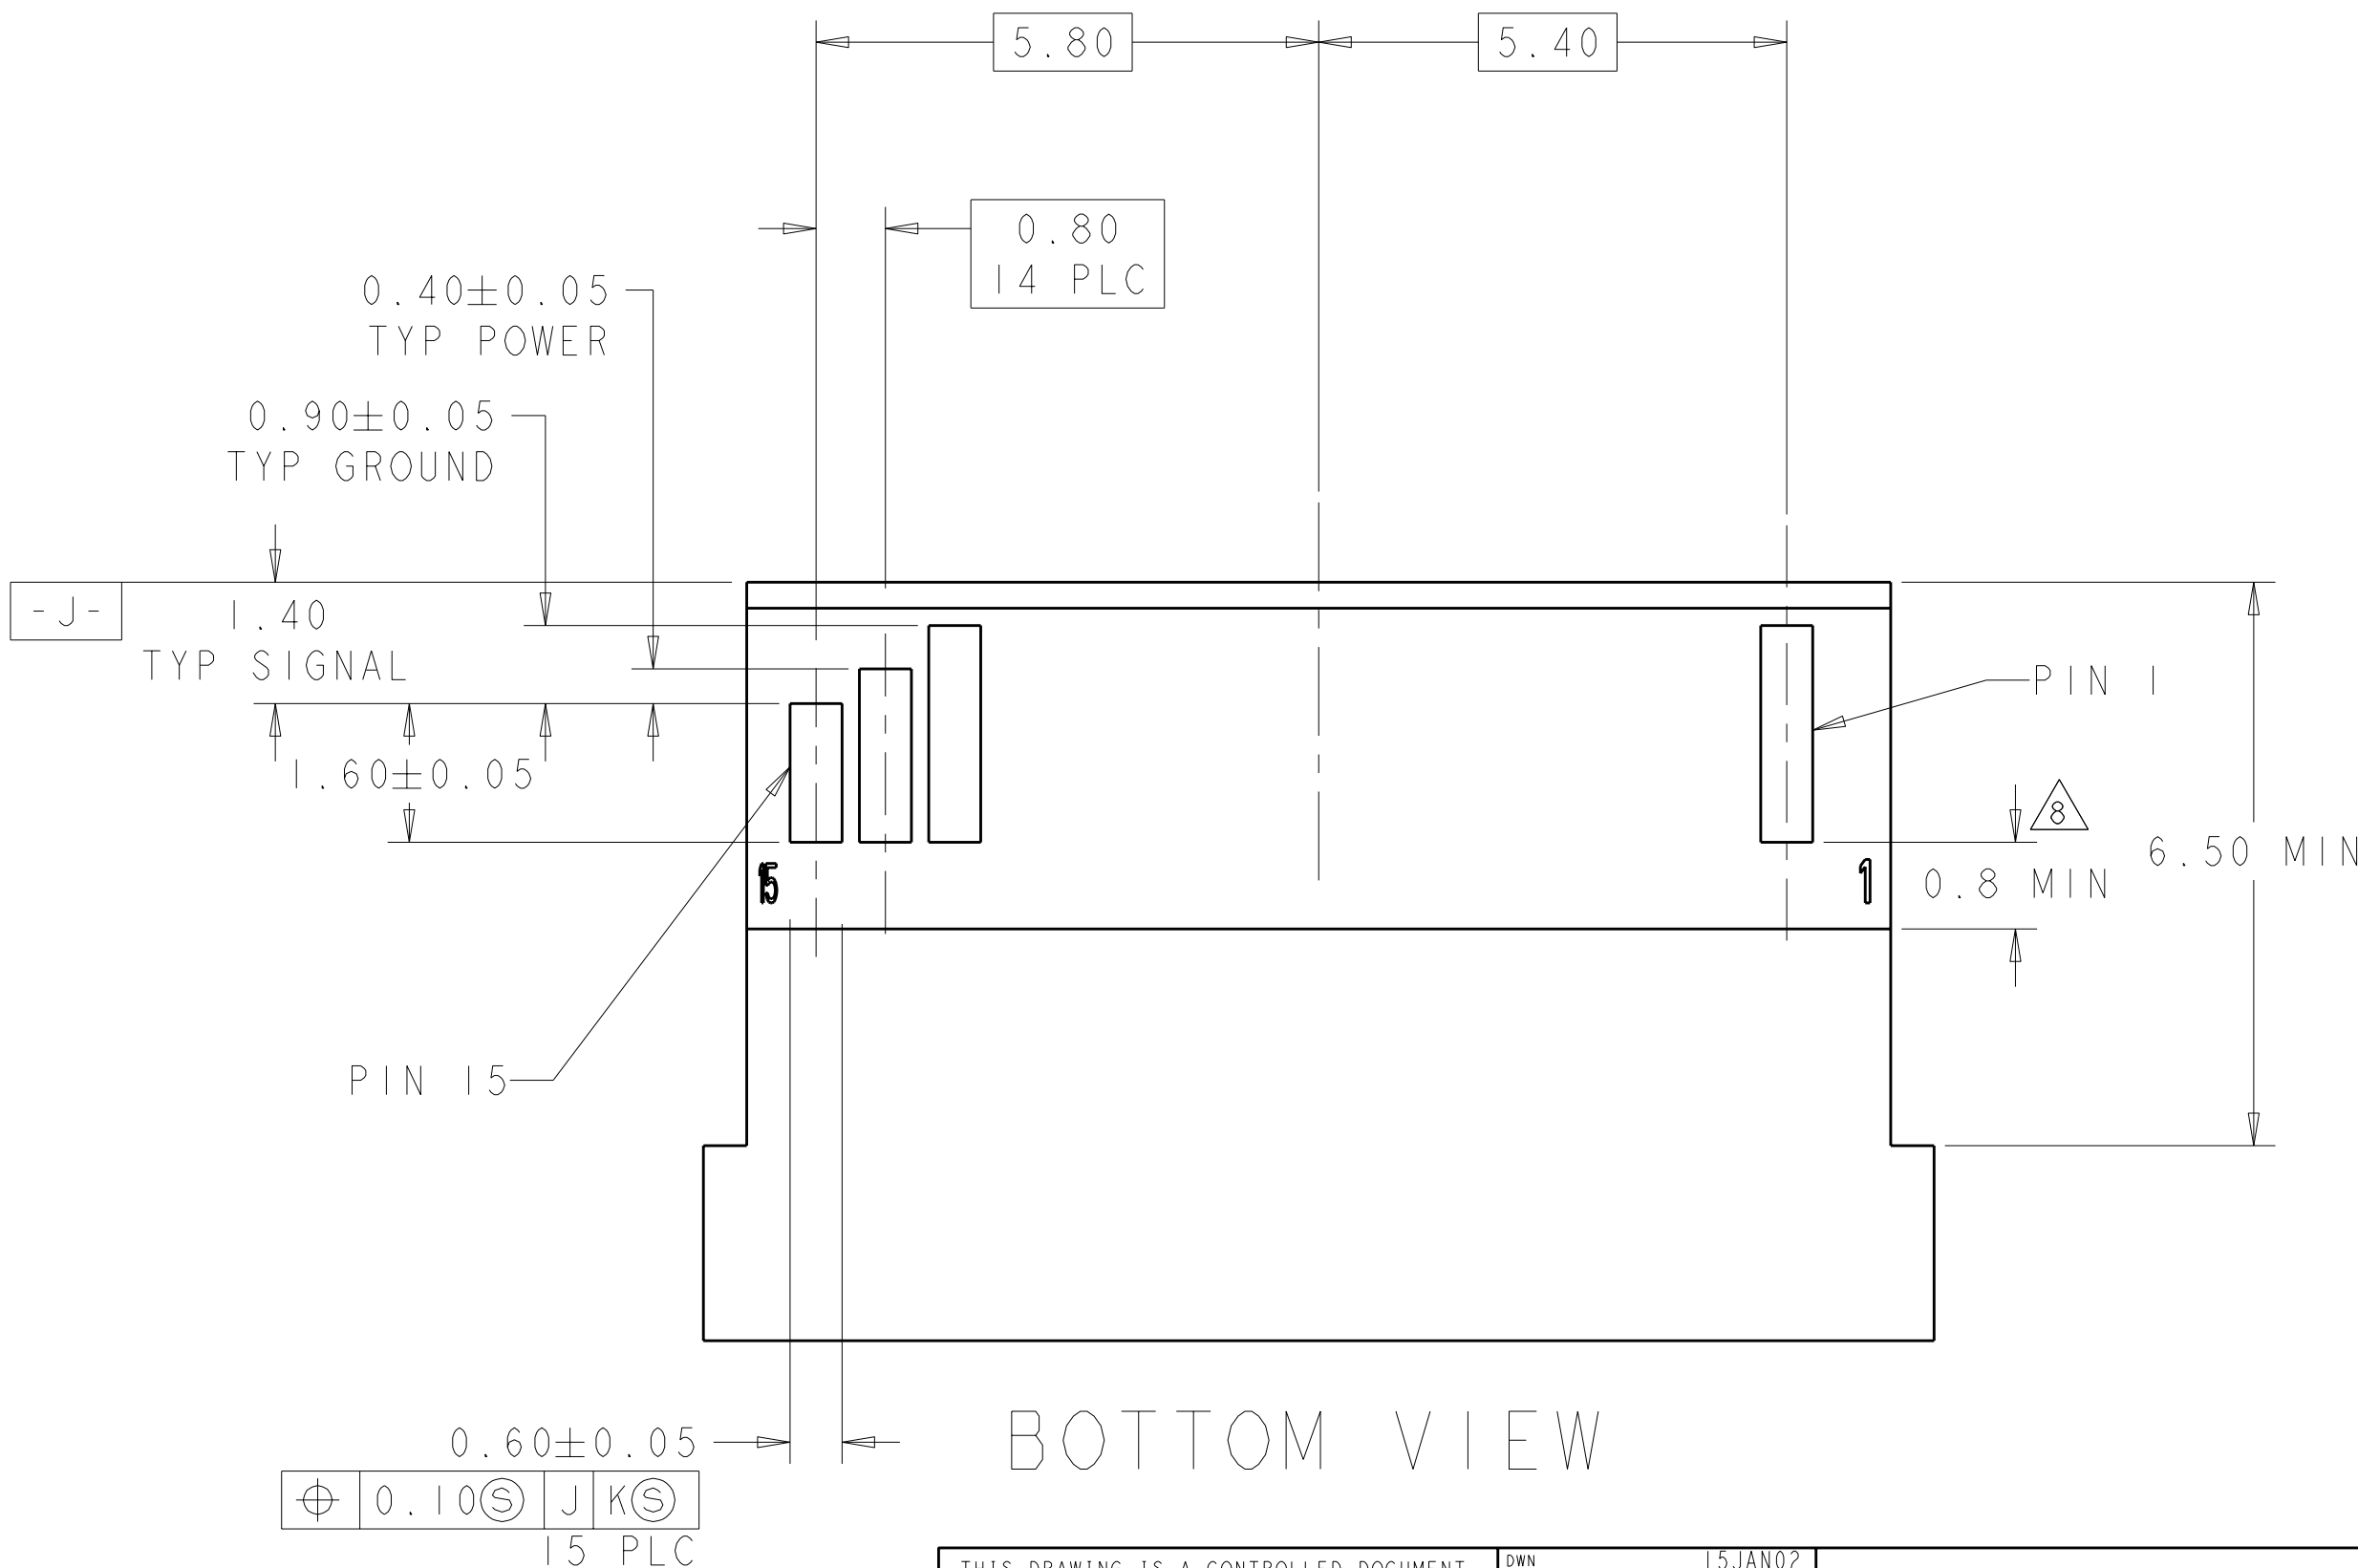

BOTTOM VIEW

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN	J. GERACE	15JAN02	 TE Connectivity		
DIMENSIONS:			CHK	J. KOPPENHEFFER	15JAN02			
TOLERANCES UNLESS OTHERWISE SPECIFIED:			APVD	M. WALMSLEY	15JAN02	NAME PT CONNECTOR ASSEMBLY, 30 POSITION, XFP, RTANG, 0.8MM PITCH - 		