


VOLEX RESERVES THE RIGHT TO ALTER NON-CRITICAL DIMENSIONS WITHOUT NOTICE.

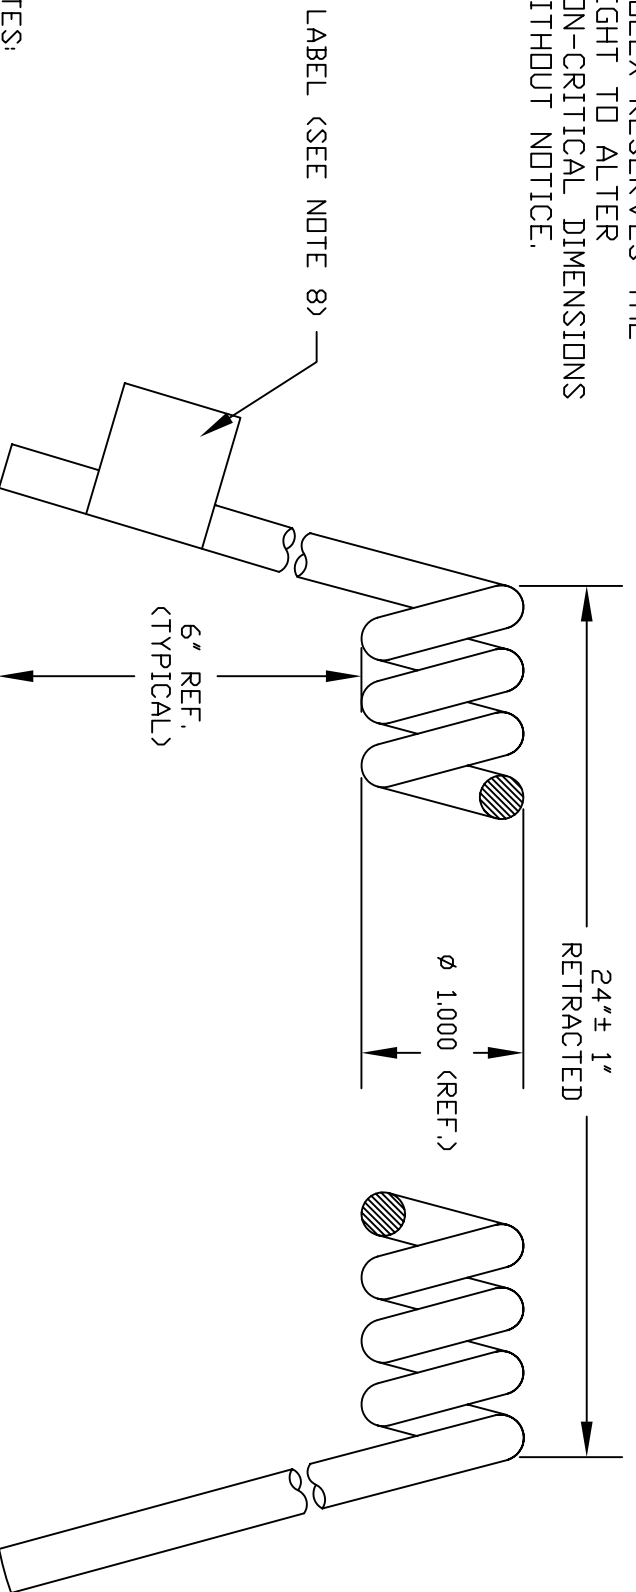

- NOTES:
- 1) 4 CONDUCTORS TOTAL, 2 CONDUCTORS (WHITE & GREEN) OF 24 AWG CONSISTING OF 41 STRANDS OF 40AWG TINNED COPPER, SHIELDED.
  - 2) CONDUCTORS (BLACK & RED) OF 23AWG CONSISTING OF 21 STRANDS OF 36AWG TINNED COPPER STRANDING.
  - 3) CONDUCTOR INSULATION MATERIAL: RUBBER
  - 4) CONDUCTOR COLORS: BLACK, WHITE, RED, & GREEN.
  - 5) JACKET INSULATION MATERIAL: NEOPRENE
  - 6) EXTENDED LENGTH APPROX 5 FT.
  - 7) RATING: 60°C / 75 VDLTS MAX.
  - 8) APPROVALS: NONE
  - 9) CORDAGE D.D. : .270" (REF.)
  - 10) CORD SET LABEL WILL HAVE VOLEX LOGO AND PART NUMBER.
  - 11) PRODUCT IS ROHS & PROP 65 COMPLIANT
  - 12) 50 PIECES PER CARTON
  - 13) ALL DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED.


3	ADDED EXTENDED LENGTH OF 5 FT	11/26/07
2	CHGD CARTON QTY FRDM 60 PCS	11/26/07
1	FIRST ISSUE	8/16/07
REV	DESCRIPTION	DATE

Indianapolis, IN  
 Conover, N.C.  
 Freemont, CA  
 Aguascalientes, MX  
 Tijuana, Mexico  
 Hermosillo, MX  
 Clinton, AR  
 Kanata, Canada

**Proprietary Notice:** This document is the property of Volex Incorporated. The information contained herein is not to be disclosed to anyone without the express written consent of Volex Inc.

**MATERIAL:** FINISH: JACKET: SMOOTH

SCALE:	NDT TO SCALE	ECD:	N/A	ITEM DESCRIPTION	23/5 RETRACTILE CORD SET
TOLERANCE UNLESS OTHERWISE SPECIFIED	.XXX ± .005	APPROVED	STC	DRAWN BY	STC
.XX ± .02	.X ± .03	PART NO.	6491	DATE:	8/16/07
FRACT. ± 1/32°	ANGULAR ± 1/2°				



CUD

FORM IN1-07 REV.A